
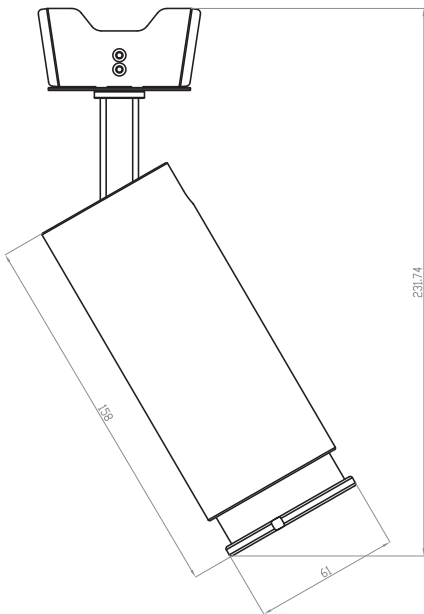


Aurora Zoom 1500 mP

Projectors | IP67 | Class II | Dimmable

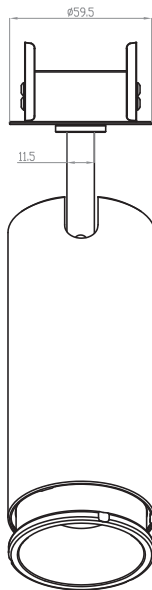

LIGHT SOURCE & OPTIC

Power
15W

Lens
Zoom 9°/40°

Beam Direction
Adjustable:
Tilting +/-103°, rotating +/-355°,
Symmetrical

Material
PMMA + glass

LED quantity
1

Binning
2 MacAdam steps

Color temperature & quality
2700K CRI>80
3000K CRI>80
3000K CRI>90
4000K CRI>90

Lifetime
(L90) >60.000 hrs

FIXTURE

Dimensions
Ø 61.5mm x H 158 mm (cylinder)

Material
Aluminium

Body finishes
Black
White
All White

Weight
690gr

Mounting
On Surface

Fixing
Springs
Base for inner connection

Working temperature
-20° / +40°

ELECTRICAL FEATURES


Power supply
Main Voltage:
400 mA

Driver requirement
Remote

Control
On/off
Push switch
Phase Cut
0/1-10 V
Casambi
DALI

Aurora Zoom 1500 mP


PHOTOMETRIC DATA (3000K CRI>90)



H (m)	D (m)	Eav (lx)
1	0.19	23690
2	0.38	5922
3	0.57	2632
4	0.76	1481
5	0.95	948

Total lumen output
920 lm

Efficacy
71 lm/W



H (m)	D (m)	Eav (lx)
1	0.66	3462
2	1.32	865
3	1.98	385
4	2.64	216
5	3.30	138


Total lumen output
1093 lm

Efficacy
74 lm/W

Aurora Zoom 1500 mP


SUGGESTED REMOTE DRIVER

On/off:
CV20-F-400-N



 Ø 55

Multifunction (DALI 2, 0/1-10V, PUSH):
CV25-DM-400-N



 Ø 55