
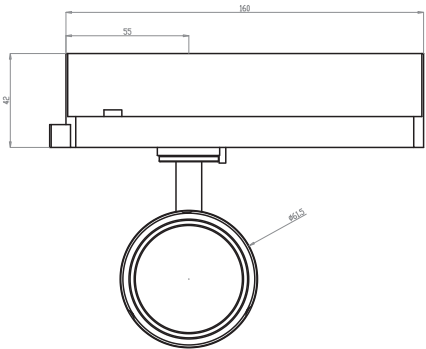


# Aurora Zoom 1500

Projectors | IP67 | Class II | Not dimmable

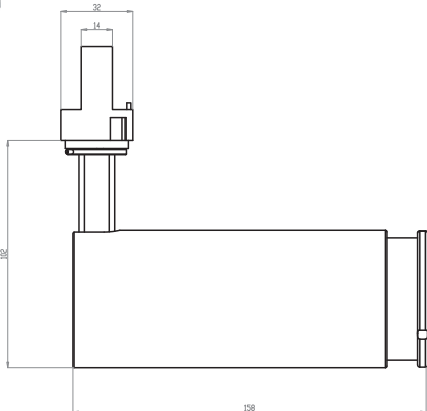

## LIGHT SOURCE & OPTIC

- Power**  
18W
- Lens**  
Zoom 9°/40°
- Beam Direction**  
Adjustable:  
Tilting +/-90°, rotating +/-355°,  
Symmetrical

**Material**  
PMMA + glass

**LED quantity**  
1

**Binning**  
2 MacAdam steps

**Color temperature & quality**  
2700K CRI>80  
3000K CRI>80  
3000K CRI>90  
4000K CRI>90

**Lifetime**  
(L90) >60.000 hrs

## FIXTURE

**Dimensions**  
Ø 61.5mm x H 158 mm (cylinder)

**Material**  
Aluminium

**Body finishes**  
Black  
White  
All White

**Weight**  
750gr

**Mounting**  
On Track

**Fixing**  
Track Connector

**Working temperature**  
-20° / +40°


## ELECTRICAL FEATURES

- Power supply**  
Main Voltage:  
220-240ac
- Driver requirement**  
Bultin driver

**Control**  
On/off

# Aurora Zoom 1500


## PHOTOMETRIC DATA (3000K CRI>90)



H (m)	D (m)	Eav (lx)
1	0.19	23690
2	0.38	5922
3	0.57	2632
4	0.76	1481
5	0.95	948

**Total lumen output**  
920 lm

**Efficacy**  
71 lm/W



H (m)	D (m)	Eav (lx)
1	0.66	3462
2	1.32	865
3	1.98	385
4	2.64	216
5	3.30	138

**Total lumen output**  
1093 lm

**Efficacy**  
74 lm/W