


Aurora Zoom 3000 PL

Track and surface zoom projectors | IP40 | Class III | Dimmable

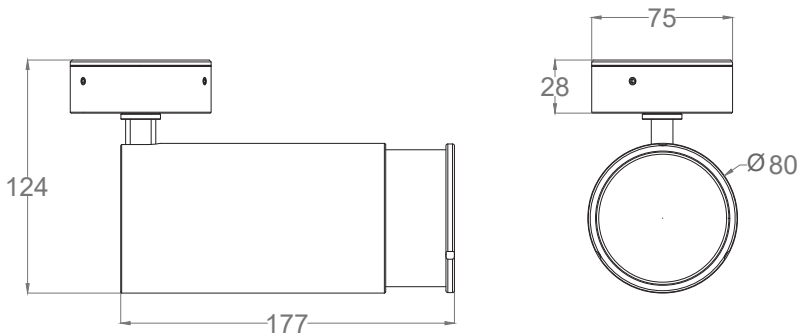

LIGHT SOURCE & OPTIC

Power
25W

Lens
Zoom 8°>45°

Beam Direction
Adjustable:
Tilting +/-90°, rotating +/-355°,
Symmetrical

Material
Glass

LED quantity
1

Binning
2 MacAdam steps

Color temperature & quality
2700K CRI>80
3000K CRI>80/90
4000K CRI>80

Lifetime
(L90) >60.000 hrs

FIXTURE

Dimensions
Ø 80mm x H 176 mm (cylinder)

Material
Aluminium

Body finishes
Black (RAL 9005)
White (RAL 9003)
All White (RAL 9003)

Weight
1030gr

Mounting
Surface

Fixing
Base for inner connection

Working temperature
-20° / +40°

ELECTRICAL FEATURES


Power supply
Constant current: 700 mA
Typical Vf= 36V

Driver requirement
Remote (not included)

Control
On/off
Push switch
Phase Cut
0/1-10 V
Casambi
DALI

Aurora Zoom 3000 PL


PHOTOMETRIC DATA (3000K CRI>80)

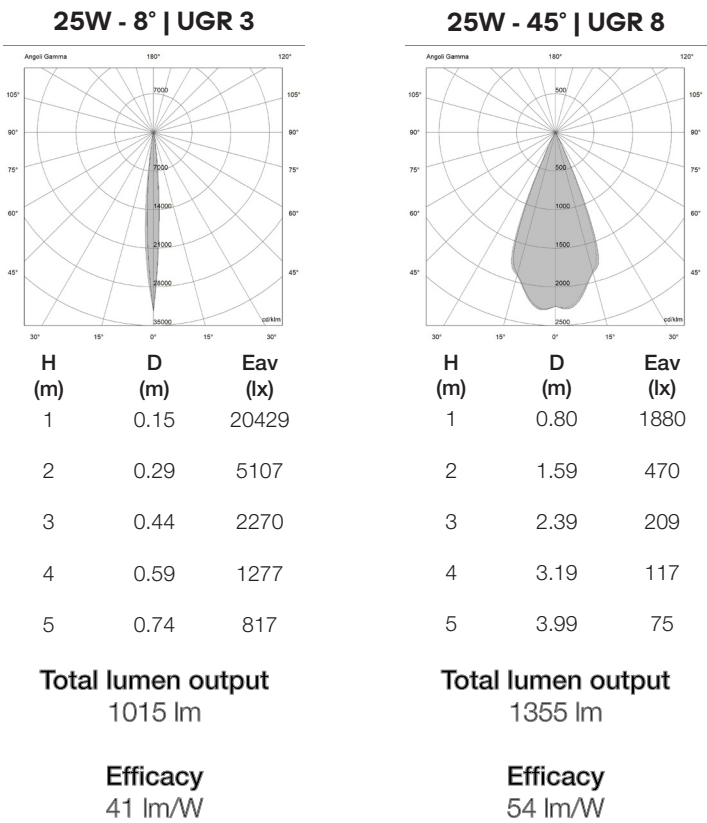

Aurora Zoom 3000 PL

SUGGESTED REMOTE DRIVER

On/off:
CC50-F-700-N



Multifunction (DALI 2, 0/1-10V, PUSH):
CC70-DM-700-N

