
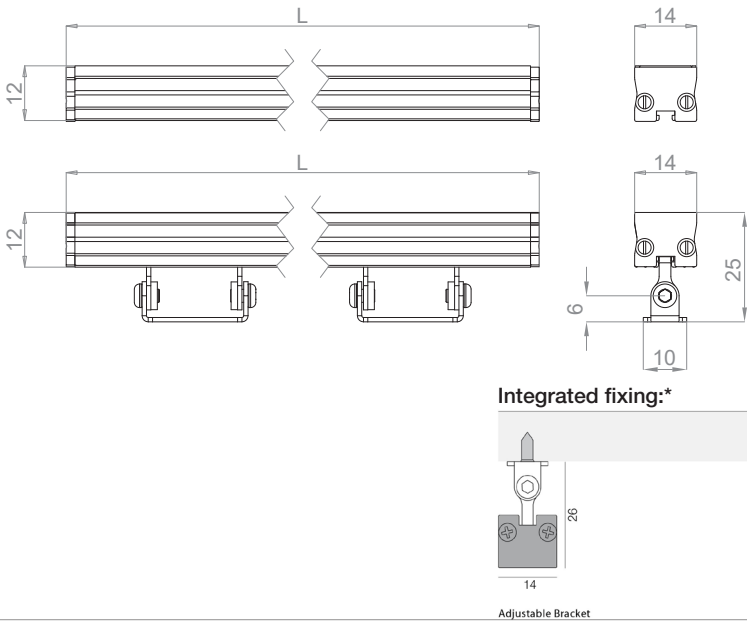


# Cometa LC IP67

Linear System | IP67 | Class III | Dimmable

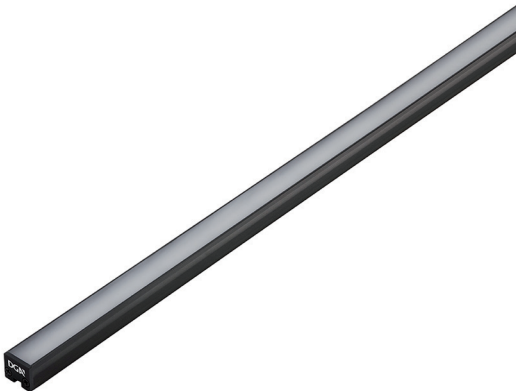

## LIGHT SOURCE & OPTIC

### Power

8W/m  
12W/m  
16W/m  
19W/m  
23W/m

### Covers

Transparent Cover 6%  
Opal Cover 25%  
Black Ghost Cover 80%

### Beam Direction

Fixed Symmetrical

### Material

Polycarbonate

### LED quantity

233/m

### Binning

2 MacAdam steps

### Color temperature & quality

2200K  
2500K  
2700K CRI>90  
3000K CRI>90  
3500K CRI>90  
4000K CRI>90

### Lifetime

(L90) >55.000 hrs

## FIXTURE

### Dimensions

12mm x 14mm x L:  
005 008 011 014 017 020 023 026 029 032  
035 038 041 044 047 050 053 056 059 062  
065 068 071 074 077 080 083 086 089 092  
095 098 101 104 107 110 113 116 119 122  
125 128 131 134 137 140 143 146 149 152  
155 158 161 164 167 170 173 176 179 182  
185 188 191 194 197 200

### Material

Aluminium

### Body finishes

Black  
Grey

### Weight

200gr/m

### End Caps

Aluminium  
Transparent

### Mounting

On surface

### Fixing

Magnetic fixing  
Double sided tape  
Without fixing (see accessories)

### Working temperature

-20° / +40°

## ELECTRICAL FEATURES

### Power supply

Constant tension: 24Vdc

### Driver requirement

Remote (not included)

### Control

On/off  
Push switch  
Phase Cut  
0/1-10 V  
Casambi  
DALI

### Cable exit

Cap exit

In&out cap exit


Left side exit

In&out side exit

Right side exit

Back exit


Back in&out exit



# Cometa LC IP67

## PHOTOMETRIC DATA (3000K CRI>90) - Opal cover

### 8W/m - 110° | UGR 26.2

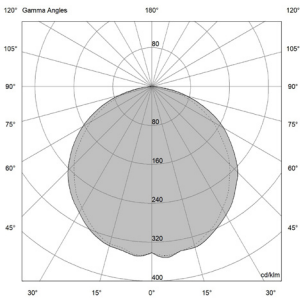


H (m)	D (m)	Eav (lx)
1	2.74	79
2	5.48	20
3	8.22	9
4	10.96	5
5	13.70	3

Total lumen output  
226 lm

Efficacy  
56 lm/W

### 12W/m - 110° | UGR 27.7

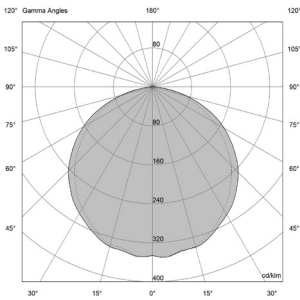


H (m)	D (m)	Eav (lx)
1	2.78	120
2	5.56	30
3	8.34	13
4	11.13	7
5	13.91	5

Total lumen output  
344 lm

Efficacy  
57 lm/W

### 12W/m - 110° | UGR 28.2

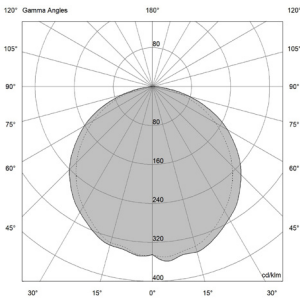


H (m)	D (m)	Eav (lx)
1	2.69	161
2	5.38	40
3	8.07	18
4	10.76	10
5	13.45	6

Total lumen output  
452 lm

Efficacy  
56 lm/W

### 19W/m - 110° | UGR 28.9

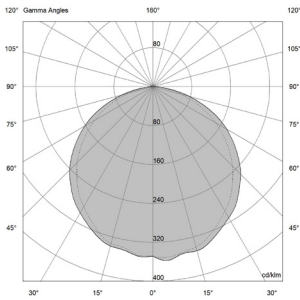


H (m)	D (m)	Eav (lx)
1	2.71	201
2	5.42	50
3	8.13	22
4	10.84	13
5	13.55	8

Total lumen output  
567 lm

Efficacy  
57 lm/W

### 23W/m - 110° | UGR 29.4

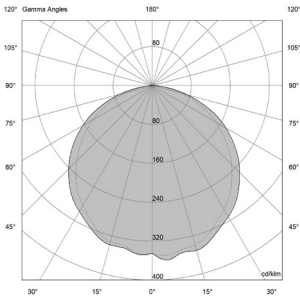

H (m)	D (m)	Eav (lx)
1	2.71	232
2	5.41	58
3	8.12	26
4	10.82	14
5	13.53	9

Total lumen output  
652 lm



Efficacy  
59 lm/W

# Cometa LC IP67

## INSTALLATION ACCESSORIES

### Brackets with screw


(Only for **N** without fixing)

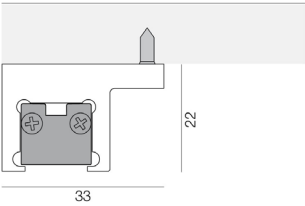

Bracket with screw 0° A00854.\_0    Bracket with screw 45° A00855.\_0


### Mounting clip

(Only for **N** without fixing)



Mounting clip  
A00856.60

### Watertight Connector




Watertight connector  
A00357.40

## SUGGESTED REMOTE DRIVERS


### On/Off :

CV70-F-24-N



### Multifunction (DALI 2, 0/1-10V, PUSH):

CV75-DM-24-NI



Other options upon request