

LIGHT SOURCE

LED quantity L=100 cm	231
Power max	8 W/m – 12 W/m – 25 W/m
Total lumen output (3000K) L=25 cm	57 lm (228 lm/m) – 89 lm (356 lm/m) – 175 lm (700 lm/m)
Efficacy lm/W (3000K)	28 lm/W – 30 lm/W – 28 lm/W
LOR (3000K)	-
CRI	>80 - >90
LED Temperature (K)	2700K - 3000K – 3500K CRI>90 - 4000K CRI>90
Average operational life	50.000 hours

OPTIC

Material	Artificial resin
Available optics	110°
Beam direction	Fixed-Adjustable
Flux symmetry	Symmetrical
Accessories	-

LED FIXTURE

Material	Aluminum
Finish	Aluminum Hard Coat Anodizing (Black, Grey)
Available finishes	Black, Grey
IP Rate	IP67
Working Temperature	-20° ÷ +40°
Accessories	Bracket with screw, Mounting clip for Cometa LC IP67 fixed

ELECTRICAL FEATURES

Driver	Remote
Dimmable	Push, 1-10V, DALI
For emergency lighting	-
Connection	In parallel at 24Vdc
Class	III

MECHANICAL FEATURES


Dimensions (mm)	14 x 12 x L
Weight	280 gr/m (fixed)-290 gr/m (adjustable)
Mounting	Wall, Ceiling, Floor
Cut-out (mm)	-
Use	Outdoor

NOTES


Please provide bracket with screw or mounting clip for Cometa LC IP67 fixed



Fixed

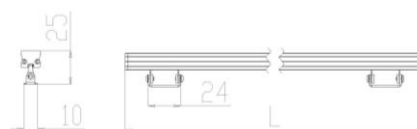

Adjustable

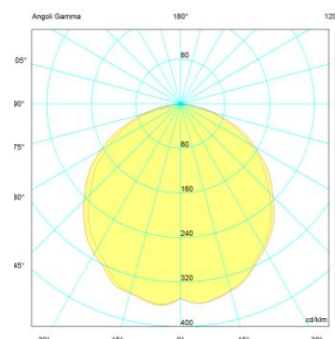

L=25 cm (25W/m)

H(m)	D(m)	E _{max} (lx)	E _{av} (lx)
110°			
0.60	1.65	174	44
1.20	3.30	44	11
1.80	4.95	19	5
2.40	6.61	11	3
3.00	8.26	7	2