
















CONTINUUM i IP67 LOUVER


-  IP67
-  Class III 24Vdc
-  Class II 220-240Vac
-  Incasso a pavimento
Floor recessed
-  WIPS - Water Infiltration Protection System
-  Carrabile 2000 kg
Drive over up to 2000 kg
-  Cavo in neoprene 100 cm
100 cm neoprene cable
(disponibile lunghezza cavo su misura)
(additional cable length available upon request)
-  Collegare in parallelo 24Vdc
Connect in parallel at 24Vdc
-  Alimentazione integrata, collegare alla tensione di rete 220-240Vac
Built-in driver, connect directly to the line voltage to 220-240Vac
-  Altamente riciclabile
Highly recyclable








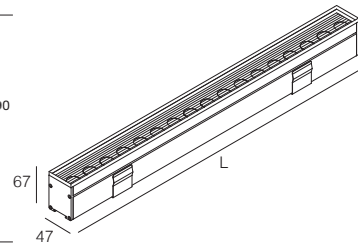
CONTINUUM i IP67

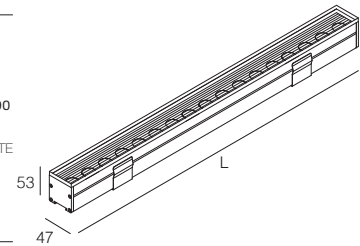




CON FRANGILUCE - WITH LOUVER


Lumen Output 3000K 1800 lm/m	9W 24Vdc	18W 24Vdc	27W 24Vdc	36W 24Vdc	Finiture Finish	Colore LED LED Colour
	L = 30 cm	L = 60 cm	L = 90 cm	L = 120 cm		
 10° Lens	734462._._	734463._._	734464._._	734465._._	■ 4 Nero - Black	<ul style="list-style-type: none"> ■ U 2200K ■ Y 2700K ■ 6 3000K ■ W 3000K CRI > 90 ■ 9 4000K ■ 8 DYNAMIC WHITE
 25° Lens	7G4462._._	7G4463._._	7G4464._._	7G4465._._		
 40° Lens	744462._._	744463._._	744464._._	744465._._		
 60° Lens	754462._._	754463._._	754464._._	754465._._		
 Lente ellittica Elliptical lens	774462._._	774463._._	774464._._	774465._._		



Lumen Output 3000K 1800 lm/m	11W 220-240Vac	21W 220-240Vac	30W 220-240Vac	40W 220-240Vac	Finiture Finish	Colore LED LED Colour
	L = 30 cm	L = 60 cm	L = 90 cm	L = 120 cm		
 10° Lens	734466._._	734467._._	734468._._	734469._._	■ 4 Nero - Black	<ul style="list-style-type: none"> ■ U 2200K ■ Y 2700K ■ 6 3000K ■ W 3000K CRI > 90 ■ 9 4000K
 25° Lens	7G4466._._	7G4467._._	7G4468._._	7G4469._._		
 40° Lens	744466._._	744467._._	744468._._	744469._._		
 60° Lens	754466._._	754467._._	754468._._	754469._._		
 Lente ellittica Elliptical lens	774466._._	774467._._	774468._._	774469._._		



Lumen Output 3000K 1800 lm/m	11W 220-240Vac	21W 220-240Vac	30W 220-240Vac	40W 220-240Vac	Finiture Finish	Colore LED LED Colour
	L = 30 cm	L = 60 cm	L = 90 cm	L = 120 cm		
 10° Lens	734470._._	734471._._	734472._._	734473._._	■ 4 Nero - Black	<ul style="list-style-type: none"> ■ U 2200K ■ Y 2700K ■ 6 3000K ■ W 3000K CRI > 90 ■ 9 4000K
 25° Lens	7G4470._._	7G4471._._	7G4472._._	7G4473._._		
 40° Lens	744470._._	744471._._	744472._._	744473._._		
 60° Lens	754470._._	754471._._	754472._._	754469._._		
 Lente ellittica Elliptical lens	774470._._	774471._._	774472._._	774473._._		

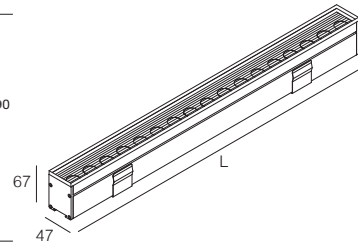

ALIMENTATORI CONSIGLIATI (non inclusi)
SUGGESTED DRIVERS (not included)

24Vdc CV75-F-24-NI
CV100-L-24-NL
DYNAMIC WHITE

ACCESSORI
ACCESSORIES

24Vdc



Micro connettore stagno
Micro watertight connector
A00357.40

220-240Vac



Connettore stagno
Watertight connector
A01023.40

EXAMPLE CODE COMPOSITION
123456.

LED COLOUR
FINISH

CONTINUUM i IP67 LOUVER

CONTROCASSE RECESSED BOXES



	CONTINUUM i IP67 24Vdc	CONTINUUM i IP67 220-240Vac	MATERIAL	USE WITH
	A01209.60	A01213.60	Acciaio Inox AISI 316L Iron Steel	CONTINUUM i IP67 L = 30 cm
	A01210.60	A01214.60	Acciaio Inox AISI 316L Iron Steel	CONTINUUM i IP67 L = 60 cm
	A01211.60	A01215.60	Acciaio Inox AISI 316L Iron Steel	CONTINUUM i IP67 L = 90 cm
	A01212.60	A01216.60	Acciaio Inox AISI 316L Iron Steel	CONTINUUM i IP67 L = 120 cm