





















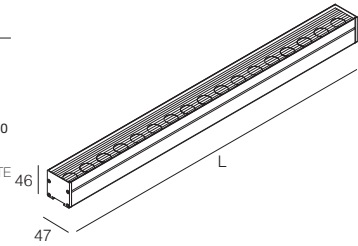
# CONTINUUM IP67 LOUVER











-  IP67
-  Class III 24Vdc
-  Class II 220-240Vac
-  Montaggio a parete, soffitto, pavimento  
Wall, ceiling, floor mounting
-  WIPS - Water Infiltration Protection System
-  Cavo in neoprene 100 cm  
100 cm neoprene cable  
(disponibile lunghezza cavo su misura)  
(additional cable length available upon request)
-  Collegare in parallelo 24Vdc  
Connect in parallel at 24Vdc
-  Alimentazione integrata, collegare alla tensione di rete 220-240Vac  
Built-in driver, connect directly to the line voltage to 220-240Vac
-  Altamente riciclabile  
Highly recyclable












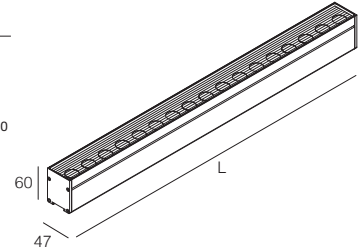

## CONTINUUM IP67 CON FRANGILUCE - WITH LOUVER


Lumen Output 3000K 2500 lm/m	9W	18W	27W	36W	45W	Finiture Finish	Colore LED LED Colour
	24Vdc	24Vdc	24Vdc	24Vdc	24Vdc		
	L = 30 cm	L = 60 cm	L = 90 cm	L = 120 cm	L = 150 cm		
 10° Lens	734395._.	734396._.	734397._.	734398._.	734399._.	■ 4 Nero - Black	 U 2200K  Y 2700K  6 3000K  W 3000K CRI > 90  9 4000K  8 DYNAMIC WHITE
 25° Lens	7G4395._.	7G4396._.	7G4397._.	7G4398._.	7G4399._.		
 40° Lens	744395._.	744396._.	744397._.	744398._.	744399._.		
 60° Lens	754395._.	754396._.	754397._.	754398._.	754399._.		
 Lente ellittica Elliptical lens	774395._.	774396._.	774397._.	774398._.	774399._.		



Lumen Output 3000K 2500 lm/m	11W	21W	30W	40W	50W	Finiture Finish	Colore LED LED Colour
	220-240Vac	220-240Vac	220-240Vac	220-240Vac	220-240Vac		
	L = 30 cm	L = 60 cm	L = 90 cm	L = 120 cm	L = 150 cm		
 10° Lens	734385._.	734386._.	734387._.	734388._.	734389._.	■ 4 Nero - Black	 U 2200K  Y 2700K  6 3000K  W 3000K CRI > 90  9 4000K
 25° Lens	7G4385._.	7G4386._.	7G4387._.	7G4388._.	7G4389._.		
 40° Lens	744385._.	744386._.	744387._.	744388._.	744389._.		
 60° Lens	754385._.	754386._.	754387._.	754388._.	754389._.		
 Lente ellittica Elliptical lens	774385._.	774386._.	774387._.	774388._.	774389._.		



Lumen Output 3000K 2500 lm/m	11W	21W	30W	40W	50W	Finiture Finish	Colore LED LED Colour
	220-240Vac	220-240Vac	220-240Vac	220-240Vac	220-240Vac		
	L = 30 cm	L = 60 cm	L = 90 cm	L = 120 cm	L = 150 cm		
 10° Lens	734390._.	734391._.	734392._.	734393._.	734394._.	■ 4 Nero - Black	 U 2200K  Y 2700K  6 3000K  W 3000K CRI > 90  9 4000K
 25° Lens	7G4390._.	7G4391._.	7G4392._.	7G4393._.	7G4394._.		
 40° Lens	744390._.	744391._.	744392._.	744393._.	744394._.		
 60° Lens	754390._.	754391._.	754392._.	754393._.	754394._.		
 Lente ellittica Elliptical lens	774390._.	774391._.	774392._.	774393._.	774394._.		

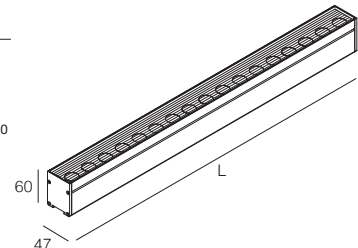

ALIMENTATORI CONSIGLIATI (non inclusi)  
SUGGESTED DRIVERS (not included)

24Vdc CV70-F-24-N  
CV100-L-24-NL  
DYNAMIC WHITE

ACCESSORI  
ACCESSORIES

24Vdc



Micro connettore stagno  
Micro watertight connector  
A00357.40

220-240Vac


















Connettore stagno  
Waterlight connector  
A01023.40

EXAMPLE CODE COMPOSITION  
123456.



## CONTINUUM IP67

	CONTINUUM 24Vdc	CONTINUUM 220-240Vac	DESCRIPTION	
<b>ELEMENTI DI FISSAGGIO</b> FIXING ELEMENTS				Staffa fissa Fixed bracket <b>A00949.60</b>
				Placca di fissaggio Fixing plate <b>A00950.40</b>
				Staffa orientabile H30 Adjustable bracket H30 <b>A00951.40</b>
				Staffa orientabile H50 Adjustable bracket H50 <b>A00952.40</b>
				Staffa orientabile H80 Adjustable bracket H80 <b>A00953.40</b>

Staffa fissa  
Fixed bracket

Placca di fissaggio  
Fixing plate

Staffa orientabile  
Adjustable bracket

