

Eclissi Mini

Steps light | IP40 | Class III | Dimmable




Eclissi Mini 360

Eclissi Mini 180

Eclissi Mini 90

Eclissi Mini 90x2

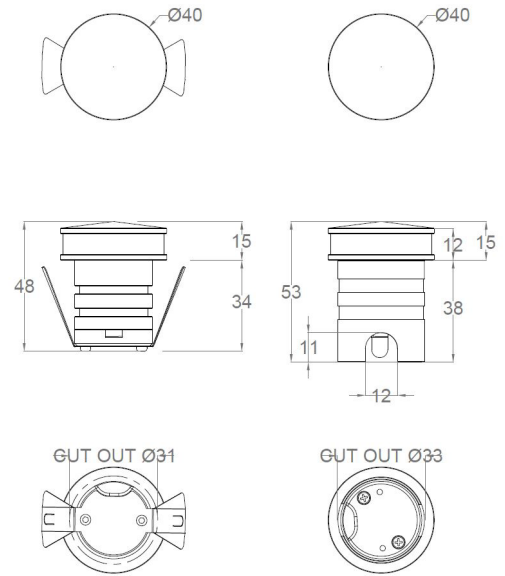

LIGHT SOURCE & OPTIC

Power

2W

Emission

Diffuse

Beam Direction

Fixed, Symmetrical/ Asymmetrical

Material

Methacrylate

LED quantity

1

Binning

2 MacAdam Steps

Color temperature & quality

2200K CRI>80

2700K CRI>90

3000K CRI>90

4000K CRI>90

Lifetime (Ta 25°)

L80 >60.000 hrs

Output (3000K CRI>90)

214 lm

FIXTURE

Dimensions

Ø 40mm x H 63mm

Material

Aluminium

Body finishes

Black

Titanium

Dark bronze

Champagne gold

Gray

Weight

100gr

Mounting

Semirecessed on wall/floor

Fixing

With accessories:

Aluminum recessed box

Spring mounting support

Working temperature

-20° / +40°

ELECTRICAL FEATURES

Power supply

Constant tension: 24 Vdc

Driver requirement

Remote (not included)

Control

On/off

Push switch

Phase Cut

0/1-10 V

Casambi

DALI

Eclissi Mini

PHOTOMETRIC DATA (3000K CRI>90)

2W - 90°	2W - 90°x2	2W - 180°	2W - 360°
Total lumen output 16 lm	Total lumen output 16 lm x 2	Total lumen output 30 lm	Total lumen output 60 lm
Efficacy 8 lm/W	Efficacy 16 lm/W	Efficacy 15 lm/W	Efficacy 30 lm/W

INSTALLATION ACCESSORIES

Aluminum recessed box (A01578.40)
Necessary element for installation at floor




Spring mounting support (A01579.60)




SUGGESTED REMOTE DRIVERS

On/Off :
CV30-F-24-PI



Ø 44

Dimmable (DALI 2) :
CV25-D-24-PI



Ø 60

Other options upon request