

LIGHT SOURCE

LED quantity	1
Power max	1 W – 2 W
Total lumen output (3000K)	112 lm – 151 lm
Efficacy lm/W (3000K)	112 lm/W – 76 lm/W
LOR (3000K)	70% - 62%
CRI	>80
LED Temperature (K)	2700-3000-4000-5000
Average operational life	50.000 hours

OPTIC

Material	PMMA
Available optics	10°-30°-40°-Transparent glass-Frosted glass-Elliptical lens
Beam direction	Fixed
Flux symmetry	Symmetrical
Accessories	-

LED FIXTURE

Material	Aluminum, AISI316L Stainless Steel
Finish	Aluminum Hard Coat Anodizing(Black, Grey)
Available finishes	Black, Grey, AISI316L Stainless Steel
IP Rate	IP67
Working Temperature	-20° ÷ +40°
Accessories	-



ELECTRICAL FEATURES

Driver	Remote
Dimmable	Push, 1-10V, DALI
For emergency lighting	-
Connection in	In series at 350mA – 500mA
Class	III

MECHANICAL FEATURES

Dimensions (mm)	Ø35 x 67
Weight	130 gr
Mounting	Wall, Ceiling, Floor recessed
Cut-out (mm)	Ø31
Use	Outdoor

NOTES

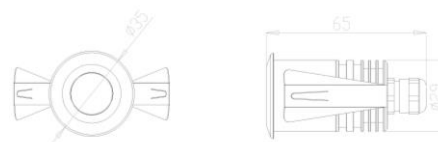

2W

H(m)	D(m)	E _{max} (lx)	E _{av} (lx)
10°			
1.00	0.33	852	538
2.00	0.67	213	134
3.00	1.00	95	60
4.00	1.33	53	34
5.00	1.66	34	22