
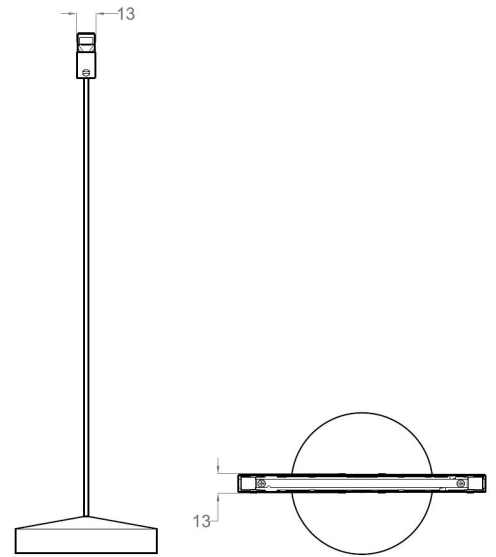
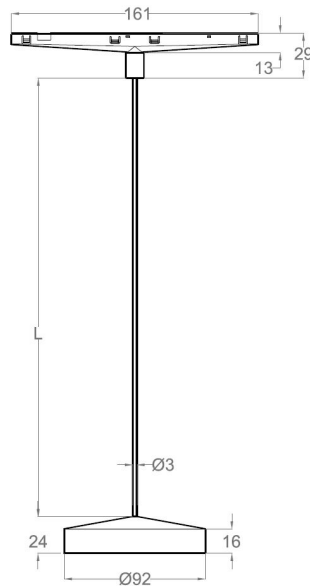


Luna B Micro

Pendant Lighting | IP40 | Class III | Dimmable

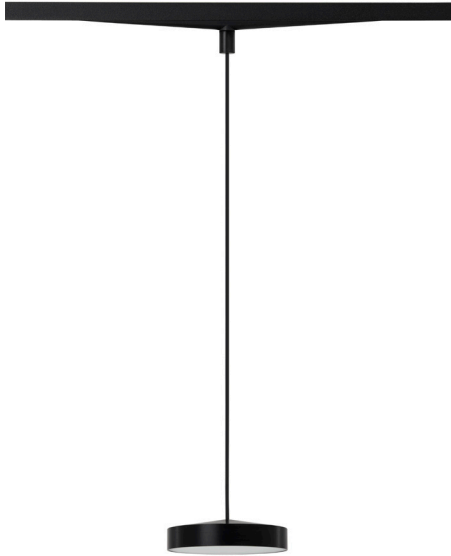

LIGHT SOURCE & OPTIC

Power

6W

Emission

Diffused

Beam Direction

Fixed, Symmetrical

Material

Glass

LED quantity

56

Binning

2 MacAdam steps

Color temperature & quality

2200K CRI>80

2700K CRI>80

3000K CRI>80/90

4000K CRI>80

Lifetime (Ta 25°)

L70 >54.000 hrs

Output (3000K CRI>90)

584 lm

FIXTURE

Dimensions

Ø 92mm x H 24mm

Material

Brass

Aluminium

Body finishes

PVD Satin Black

PVD Polished Black

PVD Gold Chrome

PVD Satin Gold

PVD Rose gold

PVD Shiny Chrome

Titanium

Dark bronze

Champagne gold

Ceiling canopy finishes

Black (RAL 9005)

White (RAL 9003)

Weight

350gr

Mounting

On Micro track

Fixing

Adapter

ELECTRICAL FEATURES

Power Supply

Constant tension: 24 Vdc

Driver requirement

Remote (not included)

Control


On/off

Broadcast

DALI

PHOTOMETRIC DATA (3000K CRI>90)

6W - 105° | UGR 26

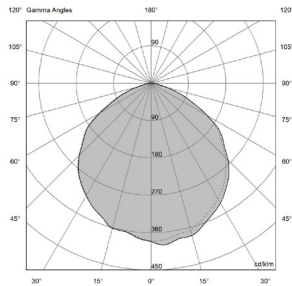

H (m)	D (m)	Eav (lx)
1	2.83	36
2	5.66	9
3	8.49	4
4	11.32	2
5	14.15	1

Total lumen output
363 lm

Efficacy
60 lm/W

Luna B Micro

INSTALLATION ACCESSORIES

Compatible with 24-48Vdc Micro Track:

Standard track (A00918._0)



Trimless track (A01064._0)




Suspended track (A01664._0)




SUGGESTED REMOTE DRIVERS

On/Off :
CC70-F-24-N



For On/Off and DALI version.
Please consider 1 address for each DALI projector.

Multifunction (DALI 2, 0/1-10V, PUSH):
CV75-DM-24-NI



For Broadcast version.
Please consider 1 address for each driver in case of DALI control.

Other options upon request