

## LIGHT SOURCE

LED quantity	1
Power max	6 W – 9W
Total lumen output (3000K)	399 lm - 513 lm
Efficacy lm/W (3000K)	66 lm/W - 57 lm/W
LOR (3000K)	72% - 69%
CRI	>80
LED Temperature (K)	2700 K – 3000 K – 4000 K – 5000 K
Average operational life	50.000 hours

## OPTIC

Material	PMMA lens
Available optics	3°-10°-30°
Beam direction	Adjustable
Flux symmetry	Symmetrical
Accessories	Low glare visor (A00519.60)

## LED FIXTURE

Material	AISI 316L Stainless steel
Finish	AISI 316L Stainless steel
Available finishes	AISI 316L
IP Rate	IP68
Working Temperature	-20° ÷ +40°
Accessories	-



## ELECTRICAL FEATURES

Driver	Remote
Dimmable	Push, 1-10V, DALI
For emergency lighting	-
Connection in	In series at 500mA – 700mA
Class	III

## MECHANICAL FEATURES

Dimensions (mm)	Ø50 x 76
Weight	380 gr
Mounting	Wall, Ceiling, Floor mounting
Cut-out (mm)	-
Use	Immersion

## NOTES

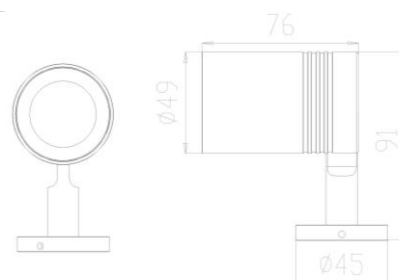

9W

H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)
30°			
1.00	0.51	2006	1291
2.00	1.02	501	323
3.00	1.54	223	143
4.00	2.05	125	81
5.00	2.56	80	52