
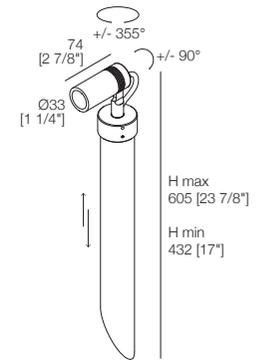



Projectors

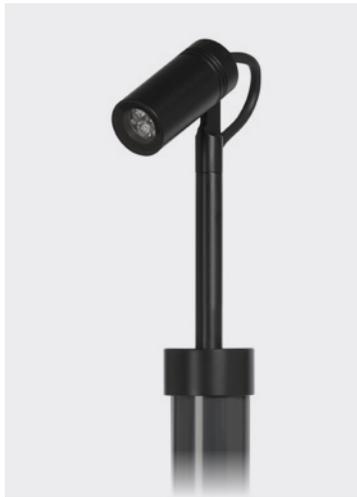

Micro Adjustable Stem

350mA	3W
Lumen Output 3000K	350mA - 270 lm
15° Lens	7A4943. __ -UL
30° Lens	764943. __ -UL
60° Lens	754943. __ -UL
Frosted Glass	714943. __ -UL
Elliptical Lens	774943. __ -UL

24V	3W
Lumen Output 3000K	24Vdc - 270 lm
15° Lens	7A4944. __ -UL
30° Lens	764944. __ -UL
60° Lens	754944. __ -UL
Frosted Glass	714944. __ -UL
Elliptical Lens	774944. __ -UL

Micro Adjustable Stem with hex louver

350mA	3W
Lumen Output 3000K	350mA - 190 lm
15° Lens	7A4945. __ -UL
30° Lens	764945. __ -UL
60° Lens	754945. __ -UL
Frosted Glass	714945. __ -UL
Elliptical Lens	774945. __ -UL

24V	3W
Lumen Output 3000K	24Vdc - 190 lm
15° Lens	7A4946. __ -UL
30° Lens	764946. __ -UL
60° Lens	754946. __ -UL
Frosted Glass	714946. __ -UL
Elliptical Lens	774946. __ -UL

FINISH	CCT
● 4 Black	● U 2200K
● 3 Gray	● Y 2700K
	● 6 3000K
	● W 3000K CRI > 90
	● 9 4000K



SUGGESTED DRIVERS (not included)

350mA **CC36-R-350-NF** p. 244
24Vdc **CV60-R-24-M** p. 248

ACCESSORIES

35 [1 3/8"]
35 [1 3/8"]
Ø39 [1 1/2"]
9 [3/8"]
Low glare visor
A00846_0

35 [1 3/8"]
Ø39 [1 1/2"]
Low glare snoot
A00847_0

EXAMPLE CODE COMPOSITION

123456. __ -UL
FIXING
CCT
FINISH