

## LIGHT SOURCE

LED quantity	1
Power max	15 W
Total lumen output (3000K)	15W: 20° - 617 lm 30° - 748 lm
Efficacy lm/W (3000K)	15W: 20° - 41 lm/W 30° - 50 lm/W
CRI	>80
LED Temperature	2700K – 3000K
Average operational life	50.000 hours

## OPTIC

Material	PMMA
Available optics	20° - 30°
Beam direction	Adjustable +70°/-50°, rotating +/- 355°
Flux symmetry	Symmetrical

## FIXTURE

Material	Aluminum
Available finishes	Hard coat anodized: 3 - Gray 4 - Black B - Dark bronze
IP Rate	IP67
Working Temperature	-20° ÷ +40°
Integrated fixing Systems	-

## ELECTRICAL FEATURES



Driver	-
Dimmable	-
Connection	In parallel at 220-240 Vac
Class	I

## MECHANICAL FEATURES

Dimensions (body)	Ø66 x 94 mm
Weight	675 gr
Installation	Wall, ceiling, floor mounting
Cut-out	-
Use	Outdoor



## ACCESSORIES

Visors	Low glare visor
Filters	-
Box/ Frame	-
Fixing system	-

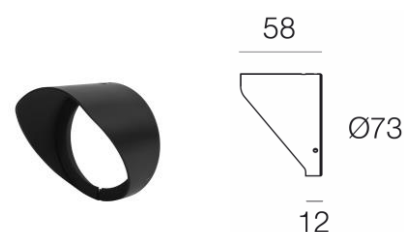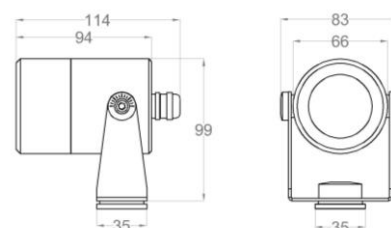

A00936\_0 Low glare visor

## PHOTOMETRIC DATA

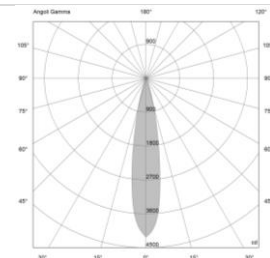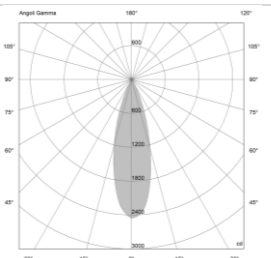20° Lens – 15W				30° Lens – 15W					
									
H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)	H(m)	D(m)	E <sub>max</sub> (lx)	E <sub>av</sub> (lx)		
<b>20°</b>				<b>30°</b>					
<u>1.00</u>	0.35	4224	2690	<u>1.00</u>	0.54	2458	1505		
<u>2.00</u>	0.69	1056	672	<u>2.00</u>	1.08	615	376		
<u>3.00</u>	1.04	469	299	<u>3.00</u>	1.62	273	167		
<u>4.00</u>	1.39	264	168	<u>4.00</u>	2.16	154	94		
<u>5.00</u>	1.73	169	108	<u>5.00</u>	2.71	98	60		

## NOTES

DRIVERLESS Technology:

Connect directly to the line voltage to 220-240Vac.

Provided with 200 cm neoprene cable.