


# POIS 150

Surface lights | IP40 | Class III | Dimmable

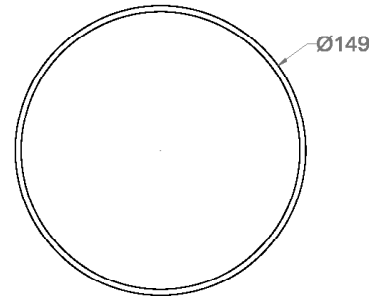

## LIGHT SOURCE & OPTIC

### Power

14W

### Lens

Diffuse emission

### Beam Direction

Fixed, Symmetrical

### Material

Opal Glass

### LED quantity

126

### Binning

2 MacAdam steps

### Color temperature & quality

2700K CRI>80

3000K CRI>80

3000K CRI>90

4000K CRI>80

### Lifetime

L70 >54.000 hrs

### Ouput (3000K CRI>90)

1257 lm

## FIXTURE

### Dimensions

Ø 149mm x H 51mm

### Material

Aluminium

### Body finishes

Black (RAL 9005)

Intense Bronze

Gold

Agate Gray (RAL 7038)

OysterWhite (RAL1013)

White (RAL 9003)

### Weight

1190gr

### Mounting

Surface Mounting

### Fixing

Springs

### Working temperature

-20° / +40°

## ELECTRICAL FEATURES

### Power supply

Constant current:

24Vdc

Typical Vf= 24V

### Driver requirement

Remote (not included)

### Control

On/off

Push switch

Phase Cut

0/1-10 V


Casambi

DALI

# POIS 150

PHOTOMETRIC DATA (3000K CRI>90)

14W | UGR 27

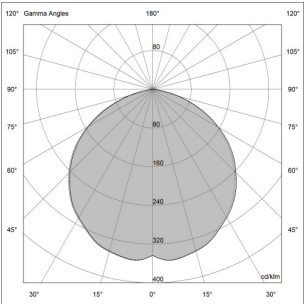

H (m)	D (m)	Eav (lx)
1	1.82	160
2	3.64	40
3	5.47	18
4	7.29	10
5	9.11	6

Total lumen output  
670 lm


Efficacy  
48 lm/W

# POIS 150

## SUGGESTED REMOTE DRIVERS

### On/off:


CV20-F-24-N



Ø 60

### Multifunction (DALI 2, 0/1-10V, PUSH):

CV25-DM-24-NI



Ø 44

Other options upon request