


POIS 150

Surface lights | IP40 | Class III | Dimmable

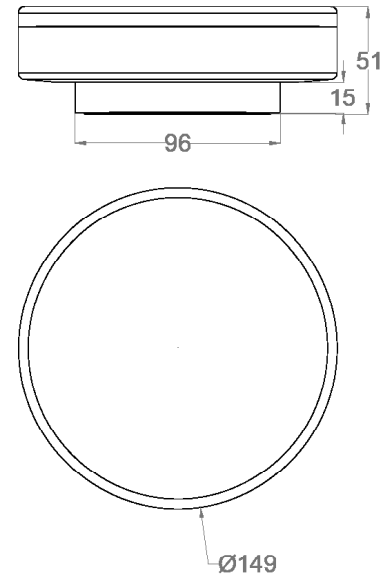

LIGHT SOURCE & OPTIC

Power

14W

Lens

Diffuse emission

Beam Direction

Fixed, Symmetrical

Material

Opal Glass

LED quantity

126

Binning

2 MacAdam steps

Color temperature & quality

2700K CRI>80

3000K CRI>80

3000K CRI>90

4000K CRI>80

Lifetime

L70 >54.000 hrs

Ouput (3000K CRI>90)

1257 lm

FIXTURE

Dimensions

Ø 149mm x H 51mm

Material

Aluminium

Body finishes

Black (RAL 9005)

Intense Bronze

Gold

Agate Gray (RAL 7038)

OysterWhite (RAL1013)

White (RAL 9003)

Weight

1190gr

Mounting

Surface Mounting

Fixing

Applique, Springs

Working temperature

-20° / +40°

ELECTRICAL FEATURES

Power supply

Constant current:

24Vdc

Typical Vf= 24V

Driver requirement

Remote (not included)

Control

On/off

Push switch

Phase Cut

0/1-10 V


Casambi

DALI

POIS 150

PHOTOMETRIC DATA (3000K CRI>90)

14W | UGR 27

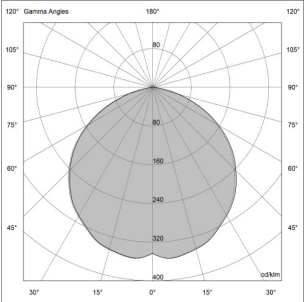

H (m)	D (m)	Eav (lx)
1	1.82	160
2	3.64	40
3	5.47	18
4	7.29	10
5	9.11	6

Total lumen output
670 lm


Efficacy
48 lm/W

POIS 150

SUGGESTED REMOTE DRIVERS

On/off:


CV20-F-24-N



Ø 60

Multifunction (DALI 2, 0/1-10V, PUSH):

CV25-DM-24-NI



Ø 44

Other options upon request