
Ritmo

Indoor | Showcase lighting | IP40 | Class III | Dimmable



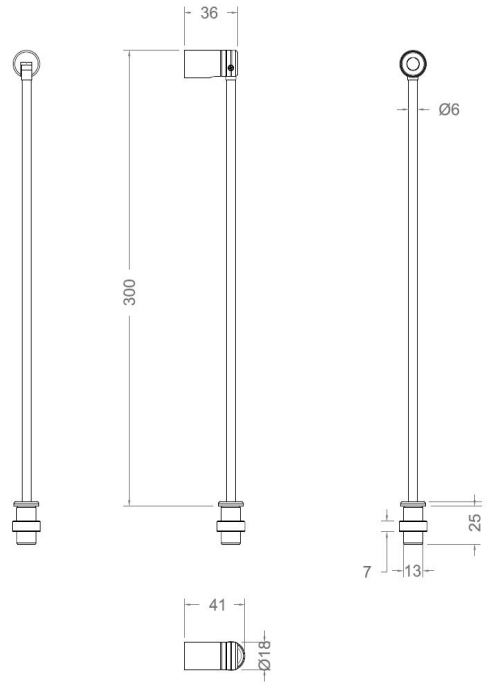

LIGHT SOURCE & OPTIC

Power
1W
2W

Zoom Lens
10° / 25° / 40° / 60°

Beam Direction
Adjustable:
Tilting +/-150°, Rotating +/-355°
Symmetrical

Material
PMMA

LED quantity
1

Binning
2 MacAdam steps

Color temperature & quality
2200K CRI>80
2700K CRI>90
3000K CRI>90
4000K CRI>90
5000K CRI>80

Lifetime (Ta 25°)
L_{80} >76.700 hrs

Output (3000K CRI>90)
86lm @ 350mA / 111lm @ 500mA

FIXTURE

Dimensions
Ø 18mm x 36 mm x H.max 300mm

Material
Aluminium

Module finishes
Black
Titanum
Champagne gold
Gray

Weight
110gr

Mounting
On telescopic pole: cut out Ø 13,5mm

Fixing
Screw base

Working temperature
-20° / +40°

ELECTRICAL FEATURES

Power supply
Constant current:
350 mA
500 mA
Typical Vf= 3V

Driver requirement
Remote (not included)


Control
On/off
Push switch
Phase Cut
0/1-10 V
Casambi
DALI

Product specifications and data are subject to change without warning, due to continue technical upgrades. Images are indicative of the quality and style of the product, but may not represent the precise details of the item you receive. Since we are constantly working to make improvements and for aesthetic reasons, cables and/or electrical elements are often not shown or specified.
For further information please check our website www.dga.it or send us an e-mail to ufficiotecnico@dga.it | Vs 221026

Ritmo

PHOTOMETRIC DATA (3000K CRI>90)

2W - 10° | UGR 10




H (m)	D (m)	Eav (lx)
1	0.23	779
2	0.45	195
3	0.68	87
4	0.91	49
5	1.14	31

Total lumen output
100 lm

Efficacy
50 lm/W

2W - 25° | UGR 14




H (m)	D (m)	Eav (lx)
1	0.33	449
2	0.66	112
3	0.99	50
4	1.32	28
5	1.65	18

Total lumen output
108 lm

Efficacy
54 lm/W

2W - 40° | UGR 20




H (m)	D (m)	Eav (lx)
1	0.49	203
2	0.98	51
3	1.47	39
4	1.96	22
5	2.45	14

Total lumen output
106 lm

Efficacy
53 lm/W

2W - 60° | UGR 30



H (m)	D (m)	Eav (lx)
1	0.67	203
2	1.34	51
3	2.01	23
4	2.68	13
5	3.35	8


Total lumen output
84 lm

Efficacy
42 lm/W


Product specifications and data are subject to change without warning, due to continue technical upgrades. Images are indicative of the quality and style of the product, but may not represent the precise details of the item you receive. Since we are constantly working to make improvements and for aesthetic reasons, cables and/or electrical elements are often not shown or specified.
For further information please check our website www.dga.it or send us an e-mail to ufficiotecnico@dga.it | Vs 221026

SUGGESTED REMOTE DRIVERS

On/Off :
CC20-F-350/500-N



Multifunction (DALI 2, 0/1-10V, PUSH RIPPLE FREE, AM DIMMING):
CC25-DM-350/500-N



Other options upon request

Product specifications and data are subject to change without warning, due to continue technical upgrades. Images are indicative of the quality and style of the product, but may not represent the precise details of the item you receive. Since we are constantly working to make improvements and for aesthetic reasons, cables and/or electrical elements are often not shown or specified.
For further information please check our website www.dga.it or send us an e-mail to ufficiotecnico@dga.it | Vs 221026