


Saturno B Multi



Low Voltage Track Projectors | IP40 | Class III | Dimmable

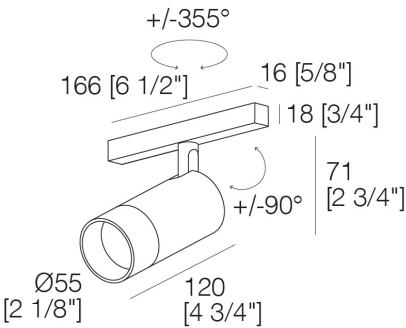

LIGHT SOURCE & OPTIC

Power
19W

Lens
12° - not interchangeable
18°/ 24°/ 33°/ 52° - interchangeable

Beam Direction
Adjustable, Symmetrical

Material
PMMA

LED quantity
1

Binning
2 MacAdam steps

Color temperature & quality
2200K CRI>90
2400K CRI>90
2700K CRI>90/95
3000K CRI>80/90/95
3500K CRI>90/95
4000K CRI>90

Lifetime (Ta 25°)
L70 >77.000 hrs

FIXTURE

Dimensions
Ø 2 1/8" x H 4 3/4"(cylinder)

Material
Aluminium

Module finishes
Warm White (RAL 9010)
White (RAL 9003)
Gray White (RAL 9002)
Gothic Cement (RAL 7033)
Gray (RAL 7012)
Beige Gray (RAL 7006)
Brown (RAL 8019)
Black (RAL 9005)

Filter holder finishes
Gold Chrome
Shiny Chrome
Satin Gold
Satin Nickel
Black

Weight
370gr (0,81 lbs)

Mounting
On track

Working temperature
-20° / +40°

ELECTRICAL FEATURES

Power supply
Constant tension 48 Vdc
Typical Vf= 18V

Driver requirement
Remote (not included)

Control
On/off
Casambi
DALI

Saturno B Multi



PHOTOMETRIC DATA (3000K CRI>90)

19W - 18° UGR 11				19W - 24° UGR 12				19W - 33° UGR 15				19W - 52° UGR 18			
H (m)	D (m)	Eav (lx)		H (m)	D (m)	Eav (lx)		H (m)	D (m)	Eav (lx)		H (m)	D (m)	Eav (lx)	
1	0.32	7316		1	0.45	3878		1	0.61	2290		1	0.99	1221	
2	0.63	1829		2	0.91	969		2	1.21	573		2	1.98	305	
3	0.95	813		3	1.36	431		3	1.82	254		3	2.98	136	
4	1.27	457		4	1.82	242		4	2.43	143		4	3.97	76	
5	1.58	293		5	2.27	155		5	3.03	92		5	4.96	49	
Total lumen output 1590 lm				Total lumen output 1490 lm				Total lumen output 1384 lm				Total lumen output 1415 lm			
Efficacy 87 lm/W				Efficacy 80 lm/W				Efficacy 73 lm/W				Efficacy 75 lm/W			

19W - 12° UGR 9			
H (m)	D (m)	Eav (lx)	
1	0.24	10281	
2	0.47	2570	
3	0.71	1142	
4	0.94	643	
5	1.18	411	
Total lumen output 1333 lm			
Efficacy 75 lm/W			

INTERCHANGEABLE ACCESSORIES

Optical Filters

- Hex louver
- Elliptical Filter
- Prismatic filter
- Softening lens

Lenses


18° / 24° / 33° / 52°

Decorative rings


- Black
- Gold Chrome
- Satin Gold
- Satin Nickel
- Shiny Chrome

INSTALLATION ACCESSORIES


Compatible with 48Vdc Multisystem Track:
Standard track (A01048._0)



Suspended track (A01351._0)




Trimless track (A01402._0)



SUGGESTED REMOTE DRIVERS

Phase dimming - 0/1..10V :
CV60-CR-48-NR



Other options upon request