

Downlights



IP40

400

1660 g

Ø80

[3 1/8"]

2

2,5

TYPE

UL LISTED


Saturno In&Out F fixing plate

	O/I...10V DIMMING	DALI DIMMING
FIXING PLATE	A01555.4R	A01555.4D


Saturno In&Out F module

400mA	14W
Lumen Output 3000K	400mA - 1550 lm
12° Lens [1]	7Q4604.____-UL
18° Lens	784604.____-UL
24° Lens	7G4604.____-UL
33° Lens	7E4604.____-UL
52° Lens	754604.____-UL

MODULE FINISH	CCT	DECORATIVE RING	OPTICAL FILTER
● H Black	● U1 2200K CRI > 90	● 4 Black	W Without Filter
● M8 Brown	● B2 2400K CRI > 90	● I Gold Chrome	E Elliptical Filter
● G3 Gray	● X 2700K CRI > 90	● 8 Satin Gold	H Hex Louver
● C Gothic Cement	● X1 2700K CRI > 95	● N Satin Nickel	P Prismatic Filter
● G7 Beige Gray	● 6 3000K	● 1 Shiny Chrome	S Softening Lens
● A6 Gray White	● W 3000K CRI > 90		
● S Warm White	● W1 3000K CRI > 95		
● 7 White	● K 3500K CRI > 90		
	● K1 3500K CRI > 95		
	● D 4000K CRI > 90		

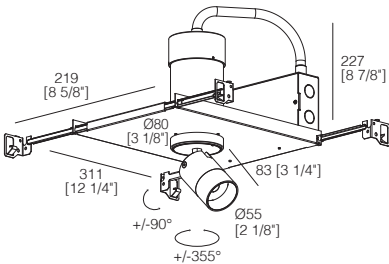

[1] 12° Lens not interchangeable

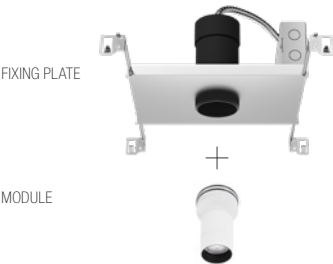

INTERCHANGEABLE ACCESSORIES



EXAMPLE CODE COMPOSITION

