


Sinfonia opal cover

Showcase Lighting | IP40 | Class III | Dimmable

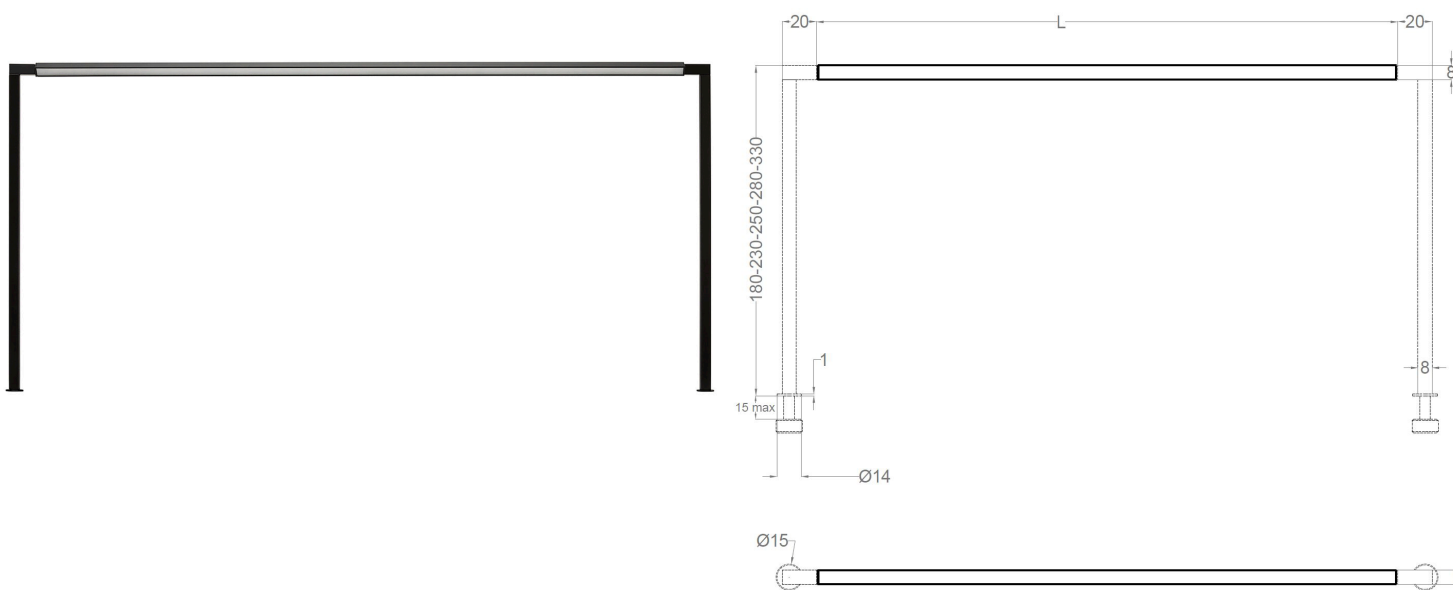

LIGHT SOURCE & OPTIC

Power

19W/m

Covers

Opal cover

Beam Direction

Adjustable: Tilting +/- 360°, Symmetrical

Material

Polycarbonate

LED quantity

233

Binning

2 MacAdam steps

Color temperature & quality

2200K CRI>80

2700K CRI>90

3000K CRI>90

3500K CRI>90

4000K CRI>90

Lifetime (Ta 25°)

L85 >95.000 hrs

FIXTURE

Dimensions

D 8mm x H 8mm x L:

030 033 036 039

042 045 048 051

054 057 060 063

066 069 072 075

078 081 084 087

090 093 096 099

102

Material

Aluminium

Body finishes

Black

Gray

Weight

210gr/m

Mounting

On poles (see accessories, page 3)

Fixing

Screw base : Ø 8mm

Working temperature

-20° / +40°

ELECTRICAL FEATURES

Power supply

Constant tension: 12 Vdc

Driver

Remote (not included)

Control

On/off

Push switch

Phase Cut

0/1-10 V

Casambi

DALI


Feature

Magnetic joint

Sinfonia opal cover

PHOTOMETRIC DATA (3000K CRI>90 - Opal cover)

15W/m - 105° | UGR 29




H (m)	D (m)	Eav (lx)
1	2.69	29
2	5.37	7
3	8.06	3
4	10.74	2
5	13.43	1

Total lumen output
782 lm

Efficacy
41 lm/W

INSTALLATION ACCESSORIES


Poles
Necessary element: please specify always 1 kit in the purchase order




	Linear pole	T pole	Corner pole
H 18 cm	A00839._0	A00928._0	A00932._0
H 23 cm	A00840._0	A00929._0	A00933._0
H 28 cm	A00841._0	A00930._0	A00934._0
H 33 cm	A00842._0	A00931._0	A00935._0

SUGGESTED REMOTE DRIVERS

On/Off :
CV20-F-12-N



Multifunction (DALI 2, 0/1-10V, PUSH):
CV25-DM-12-NI



Other options upon request