



# TINI

- IP40
- Class III
- Montaggio a parete, soffitto, pavimento  
Wall, ceiling, floor mounting
- Collegare in serie 350mA o 500mA  
Connect in series at 350mA or 500mA
- 70 gr
- Altamente riciclabile  
Highly recyclable




**Sei ottiche disponibili**  
**Svariate tipologie di fissaggio**  
**Eleganti finiture**

Six optics available  
Various types of fastening  
Elegant finishes

## TINI


	1W 350mA	2W 500mA	3W 350mA	Finiture Finish	Colore LED LED Colour	Elementi di fissaggio Fixing element
Lumen Output 3000K	110lm	200lm	300lm			
10° Lens	733192...-UL	733193...-UL		3 Grigio - Gray 4 Nero - Black T Titanio - Titanium Z Champagne Gold	U 2200K Y 2700K X 2700K CRI > 90 6 3000K W 3000K CRI > 90 9 4000K 1 5000K	G Ghiera - Ring nut L Molle - Springs M Magnetico - Magnetic P Applique - Applique
15° Lens			7A3194...-UL			
30° Lens	763192...-UL	763193...-UL	763194...-UL			
40° Lens	743192...-UL	743193...-UL				
60° Lens			753194...-UL			
Lente ellittica Elliptical lens	773192...-UL	773193...-UL	773194...-UL			

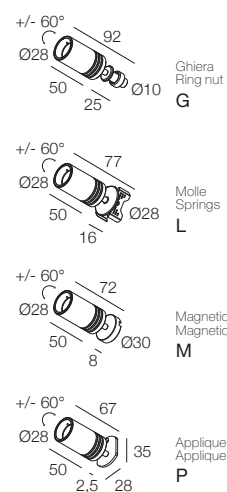

ALIMENTATORI CONSIGLIATI (non inclusi)  
SUGGESTED DRIVERS (not included)

350mA CC30-M-350-NW  
500mA CC30-M-500-NW

ELEMENTI DI FISSAGGIO  
FIXING ELEMENTS

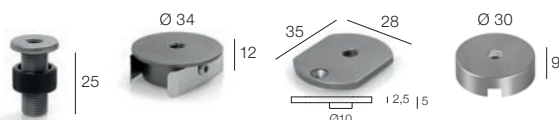

- Ghiera  
Ring nut  
**G**  
 Ø 10 mm
- Molle  
Springs  
**L**  
 Ø 28 mm
- Applique  
Applique  
**P**  
 Ø 10 mm
- Magnetico  
Magnetic  
**M**

ACCESSORI  
ACCESSORIES



- Visiera  
antiabbagliamento  
Low glare visor  
**A00665\_0**
- Visiera cilindrica  
antiabbagliamento  
Low glare tube visor  
**A00666\_0**

EXAMPLE CODE COMPOSITION  
123456...-UL

