


Tono i IP67 GS

Recessed Light | IP67 | Class III | Dimmable

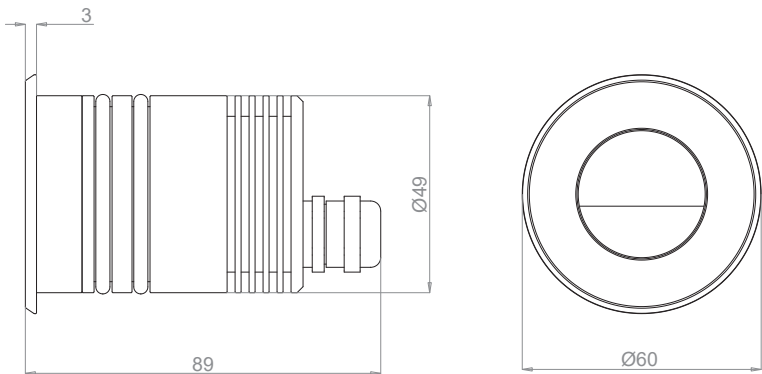

LIGHT SOURCE & OPTIC

Power

6W
7W

Lens

30° Asymmetric

Beam Direction

Fixed

Material

PMMA

LED quantity

1

Binning

2 MacAdam steps

Color temperature & quality

2200K
3000K
3000K CRI>90
3500K
4000K

Lifetime

(L90) >55.000 hrs

FIXTURE

Dimensions

Ø 60mm x H 89mm

Material

Aluminium

Body finishes

Black
Grey
Stainless Steel 361L

Weight

325gr

Mounting

Recessed

Fixing

Wall-Floor Recessed

Working temperature

-20° / +40°

ELECTRICAL FEATURES

Power supply

Main Voltage:
24Vdc
500 mA

Driver requirement


Remote (not included)

Control

On/off
Push switch
Phase Cut
0/1-10 V
Casambi
DALI

Tono i IP67 GS

PHOTOMETRIC DATA (3000K CRI>80)

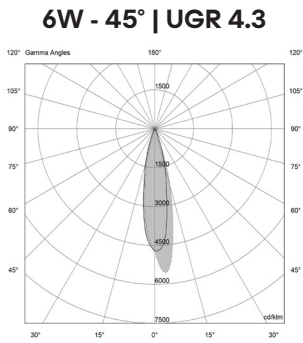

H (m)	D (m)	Eav (lx)
1	0.43	782
2	0.85	195
3	1.28	87
4	1.71	49
5	2.14	31


Total lumen output
141 lm

Efficacy
24 lm/W


Tono i IP67 GS

INSTALLATION ACCESSORIES

Alluminium recessed box (A00489.40)




Watertight connector (A00387.40)

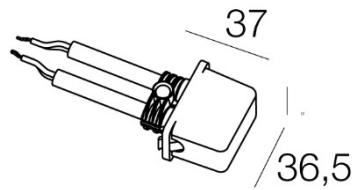

SUGGESTED REMOTE DRIVER

On/off:

CC14-F500-PI / CC14-F900-PI
CV30-F-24-PI

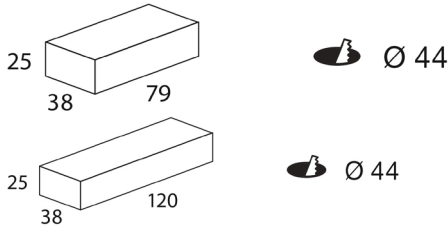

Multifunction (DALI 2, 0/1-10V, PUSH):

CC20-M-500-P / CC10-D-900-PI
CV25-D-24-PI

