


Tono im IP67 with hex louver

Recessed Light | IP67 | Class III | Dimmable

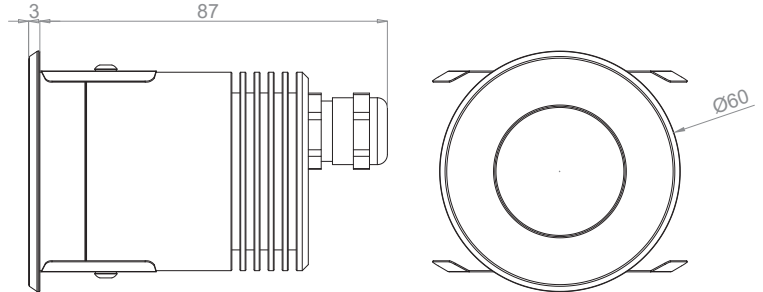

LIGHT SOURCE & OPTIC

Power

3W
6W
7W (24Vdc)

Lens

3°
10°
30°
50°

Beam Direction

Fixed

Material

PMMA

LED quantity

1

Binning

2 MacAdam steps

Color temperature & quality

2200K CRI>80
2700K CRI>80
3000K CRI>80 / CRI>90
3500K CRI>80
4000K CRI>80

Lifetime

(L90) >55.000 hrs

FIXTURE

Dimensions

Ø 60mm x H 93mm

Material

Aluminium

Body finishes

Black
Gray
White
Stainless Steel AISI 316L

Weight

325gr

Mounting

Recessed: cut out Ø 54mm

Fixing

Wall - Floor Recessed

Working temperature

-20° / +40°

ELECTRICAL FEATURES

Power supply

Constant current:
900 mA (3W)
500 mA (6W)
Typical Vf= 3V (3W)
Typical Vf= 12V (6W)
Constant tension:
24Vdc (3W/7W)

Driver requirement

Remote (not included)


Control

On/off
Push switch
Phase Cut
0/1-10 V
Casambi
DALI

Tono im IP67 with hex louver

PHOTOMETRIC DATA (3000K CRI>80)

3W - 3° | UGR 1.5

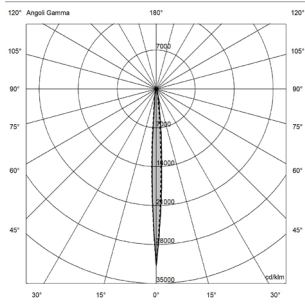


H (m)	D (m)	Eav (lx)
1	0.11	2628
2	0.22	657
3	0.33	292
4	0.44	164
5	0.55	105

Total lumen output
136 lm

Efficacy
45 lm/W
45 lm/W (24Vdc)

6W - 10° | UGR 4

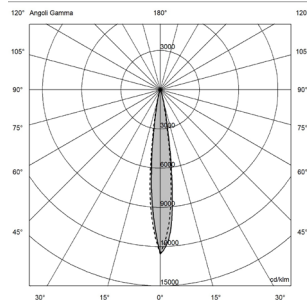


H (m)	D (m)	Eav (lx)
1	0.25	2680
2	0.50	670
3	0.74	298
4	0.99	167
5	1.24	107

Total lumen output
335 lm

Efficacy
56 lm/W
48 lm/W (24Vdc)

6W - 30° | UGR 6.2

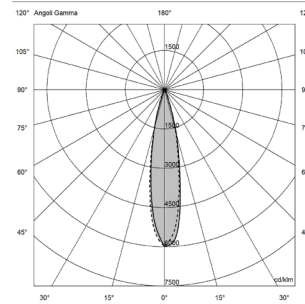


H (m)	D (m)	Eav (lx)
1	0.37	998
2	0.74	250
3	1.11	111
4	1.48	62
5	1.85	40

Total lumen output
263 lm

Efficacy
44 lm/W
37 lm/W (24Vdc)

6W - 50° | UGR 7.6

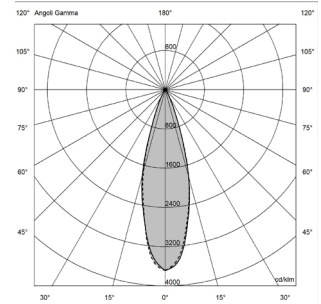

H (m)	D (m)	Eav (lx)
1	0.53	514
2	1.07	129
3	1.60	57
4	2.13	32
5	2.66	21


Total lumen output
231 lm

Efficacy
38 lm/W
33 lm/W (24Vdc)


Tono im IP67 with hex louver

INSTALLATION ACCESSORIES

Alluminium recessed box (A00489.40)





Watertight connector (A00387.40)



SUGGESTED REMOTE DRIVER

On/off:

CC14-F-500-PI / CC14-F-900-PI
CV30-F-24-PI

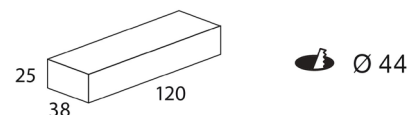

Multifunction (DALI 2, 0/1-10V, PUSH):

CC20-M-500-P / CC10-D-900-PI
CV25-D-24-PI

