
Tono Super AF

Indoor | Downlights | IP40 | Class III | Dimmable



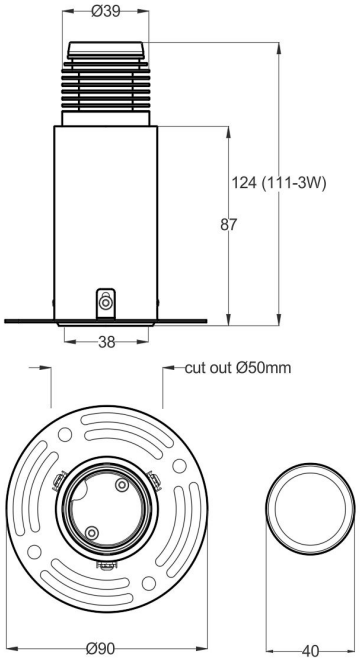

LIGHT SOURCE & OPTIC

Power
3W
6W/9W

Lens
3° - 3W
10°/ 30° - 6/9W

Beam Direction
Fixed, Symmetrical

Material
PMMA

LED quantity
1

Binning
2 MacAdam steps

Color temperature & quality
2200K CRI>80
2700K CRI>80
3000K CRI>80/90
3500K CRI>80
4000K CRI>80

Lifetime (Ta 25°)
L_{90} >60.500 hrs

Output (3000K CRI>90)
265 lm @ 900mA
578 lm @ 500mA / 784 lm @ 700mA

FIXTURE

Dimensions
Ø 90mm x H 124mm (111mm - 3/6W)

Material
Aluminium

Body finishes
Black (RAL 9005)
Gothic Cement (RAL 7033)
Corten
Gold
Oyster white (RAL 1013)
White (RAL 9003)

Weight
180gr

Mounting
Recessed: cut out Ø 50mm

Fixing
Fixing frame (see page 3)

Working temperature
-20° / +40°

ELECTRICAL FEATURES

Power supply
Constant current:
900mA
500mA / 700mA
Typical Vf= 3V (3W)
Typical Vf= 12V (6/9 W)

Driver requirement
Remote (not included)


Control
On/off
Push switch
Phase Cut
0/1-10 V
Casambi
DALI

Product specifications and data are subject to change without warning, due to continue technical upgrades. Images are indicative of the quality and style of the product, but may not represent the precise details of the item you receive. Since we are constantly working to make improvements and for aesthetic reasons, cables and/or electrical elements are often not shown or specified.
For further information please check our website www.dga.it or send us an e-mail to ufficiotecnico@dga.it | Vs 021126

Tono Super AF

PHOTOMETRIC DATA (3000K CRI>90)

3W - 3° | UGR 18




H (m)	D (m)	Eav (lx)
1	0.10	2356
2	0.20	589
3	0.31	262
4	0.41	147
5	0.51	94

Total lumen output
134 lm

Efficacy
52 lm/W

6W - 10° | UGR 21




H (m)	D (m)	Eav (lx)
1	0.30	1598
2	0.60	400
3	0.90	178
4	1.20	100
5	1.50	64

Total lumen output
322 lm

Efficacy
56 lm/W

6W - 30° | UGR 23




H (m)	D (m)	Eav (lx)
1	0.39	724
2	0.79	181
3	1.18	80
4	1.57	45
5	1.97	29

Total lumen output
260 lm

Efficacy
44 lm/W

9W - 10° | UGR 22




H (m)	D (m)	Eav (lx)
1	0.30	2075
2	0.60	519
3	0.90	231
4	1.20	130
5	1.50	83

Total lumen output
418 lm

Efficacy
49 lm/W

9W - 30° | UGR 24



H (m)	D (m)	Eav (lx)
1	0.39	935
2	0.79	234
3	1.18	104
4	1.57	58
5	1.97	37

Total lumen output
335 lm


Efficacy
38 lm/W

Product specifications and data are subject to change without warning, due to continue technical upgrades. Images are indicative of the quality and style of the product, but may not represent the precise details of the item you receive. Since we are constantly working to make improvements and for aesthetic reasons, cables and/or electrical elements are often not shown or specified.
For further information please check our website www.dga.it or send us an e-mail to ufficiotecnico@dga.it | Vs 021126

Tono Super AF


INSTALLATION ACCESSORIES

Fixing rame (A00655.30)
Necessary element: please specify always 1 frame for each Fixture in the purchase order




INSTALLATION TOOL

Hole saw (A00832.H0)
available for easier installation




SUGGESTED REMOTE DRIVERS


On/Off :
CC10-F-500-SI




CC10-F-700-SI




CC23-F-900-SP




Multifunction (DALI 2, 0/1-10V, PUSH RIPPLE FREE, AM DIMMING):
CC15-D-500-S



CC15-D-700-S



CC25-DM-900-N



Other options upon request

Product specifications and data are subject to change without warning, due to continue technical upgrades. Images are indicative of the quality and style of the product, but may not represent the precise details of the item you receive. Since we are constantly working to make improvements and for aesthetic reasons, cables and/or electrical elements are often not shown or specified.
For further information please check our website www.dga.it or send us an e-mail to ufficiotecnico@dga.it | Vs 021126