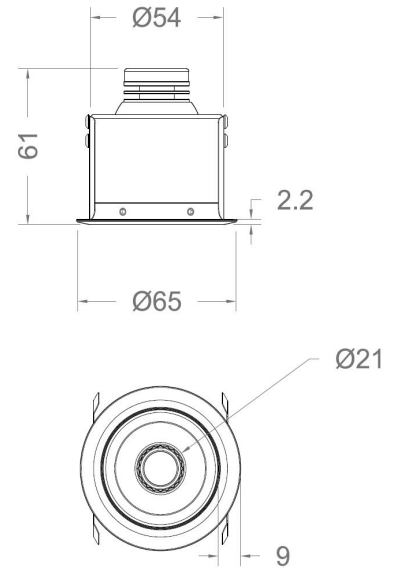


Zoom mR

Small downlights | IP40 | Class III | Dimmable



LIGHT SOURCE & OPTIC

Power

3W

Zoom Lens

10° >40°

Beam Direction

Adjustable:
Tilting +/-25°, Rotating +/-360°,
Symmetrical

Material

Optical glass

LED quantity

1

Binning

2 MacAdam steps

Color temperature & quality

2700K CRI>80
3000K CRI>80/90
4000K CRI>80
5000K CRI>80

Lifetime

(L90) >60.000 hrs

FIXTURE

Dimensions

Ø 65mm x H 61mm

Material

Aluminium

Module finishes

Black
Gray
White (RAL9003)

Weight

170gr

Mounting

Recessed: cut out Ø 54mm

Fixing

Springs

Working temperature

-20° / +40°

ELECTRICAL FEATURES

Power supply

Constant current:
900 mA
Typical Vf= 3V

Driver requirement

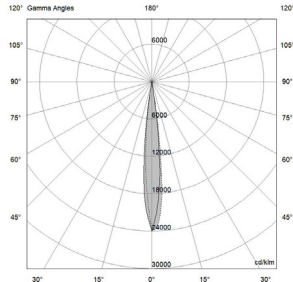
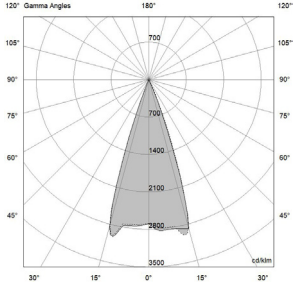
Remote (not included)

Control

On/off
Push switch
Phase Cut
0/1-10 V
Casambi
DALI

Zoom mR



PHOTOMETRIC DATA (3000K CRI>90)

3W - 10° UGR 8			3W - 40° UGR 2		
					
H (m)	D (m)	Eav (lx)	H (m)	D (m)	Eav (lx)
1	0.21	354	1	0.67	108
2	0.42	88	2	1.34	27
3	0.62	39	3	2.01	12
4	0.83	22	4	2.68	7
5	1.04	14	5	3.35	4
Total lumen output 23 lm			Total lumen output 54 lm		
Efficacy 8 lm/W			Efficacy 18 lm/W		



SUGGESTED REMOTE DRIVERS

On/Off :

CC20-F-350-N

 Ø 55**Multifunction (DALI 2, 0/1-10V, PUSH
RIPPLE FREE, AM DIMMING):**

CC25-DM-350-N

 Ø 55

Other options upon request