






discover more

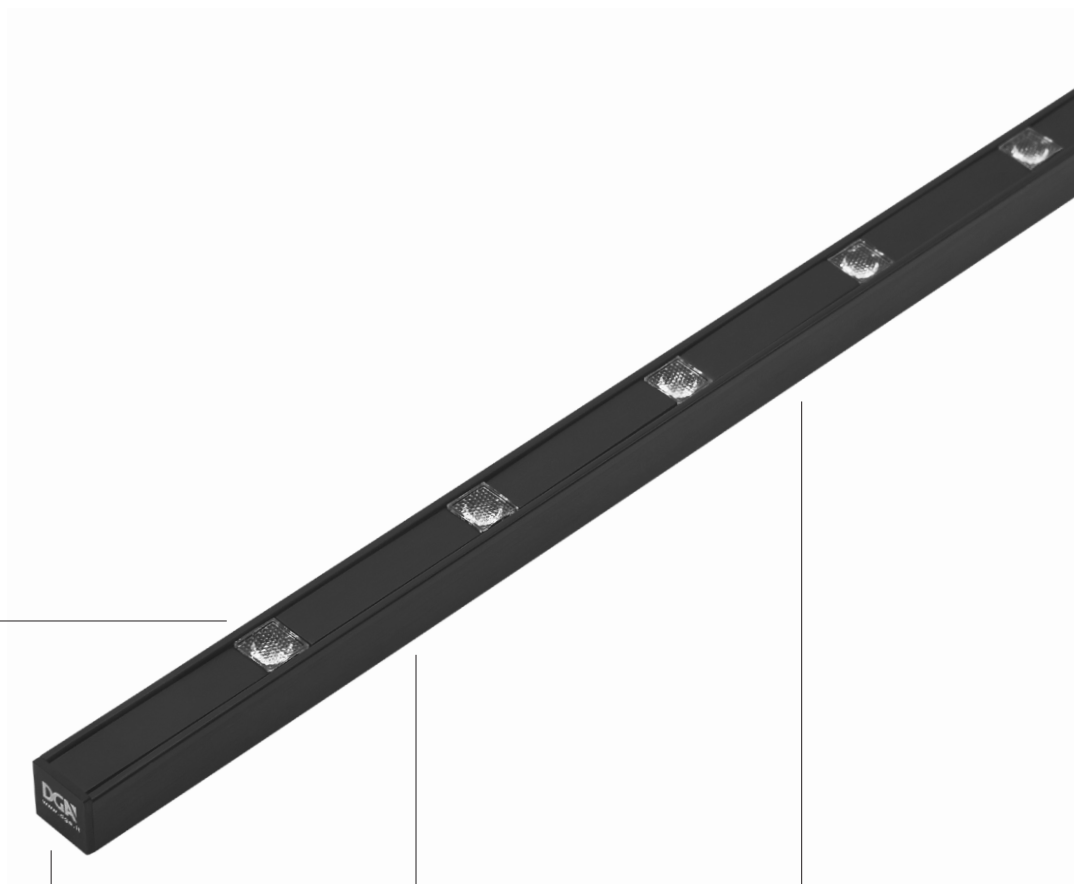

## LENS



**L20**  
20° Lens




**L30**  
30° Lens




**L50**  
50° Lens

## END CAP




**A**  
Aluminum


## EXIT CABLE




**A**  
Cap Exit




**AB**  
In&Out Cap Exit




**C**  
Left Side Exit




**CD**  
In&Out Side Exit



**D**  
Right Side Exit



**E**  
Back Exit



**EF**  
Back In&Out Exit


## FIXING



**M**  
Magnetic Fixing




**B**  
Double Sided Tape




**N**  
Without Fixing

## FIXING

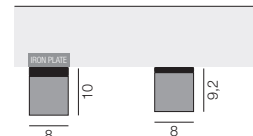

**M**  
Magnetic Fixing

**B**  
Double Sided Tape



Iron plate for **M** Magnetic Fixing  
**A01743.H0**

Linear with Lenses IP40




IP40

12Vdc

120  
g/m

2



Lumen Output 3000K CRI > 90  
25W/m - 20° Lens - Finish Black: 1600 lm/m

CODE  
LC8L - 25 - [ ] - [ ] - A - [ ] - [ ] - [ ]

POWER	LENGTH (cm)										LENS	END CAP	EXIT CABLE	FIXING	FINISH	CCT
25 25W/m	010	019	028	037	046	055	064	073	082	091	L20 20° Lens	A Aluminum	A Cap Exit	M Magnetic Fixing	● 4 Black	● U 2200K
	100	109	118	127	136	145	154	163	172	181	L30 30° Lens		AB In&Out Cap Exit	B Double Sided Tape	● 3 Gray	● Q 2500K
	190										L50 50° Lens		C Left Side Exit	N Without Fixing		● X 2700K CRI > 90
	Custom lengths upon request												CD In&Out Side Exit			● W 3000K CRI > 90
													D Right Side Exit			● K 3500K CRI > 90
													E Back Exit			● D 4000K CRI > 90
													EF Back In&Out Exit			

ACCESSORIES (only for N without fixing)

IRON PLATE

Iron plate for Magnetic Bracket  
A01744.H0

MAGNETIC BRACKETS

Magnetic brackets 0°  
A00534.\_ 0

Magnetic brackets 45°  
A01755.\_ 0

BRACKETS WITH SCREWS

Bracket with screw 0°  
A00529.\_ 0

Bracket with screw 45°  
A00845.\_ 0

MOUNTING CLIP

Mounting clip  
A00706.\_ 0