
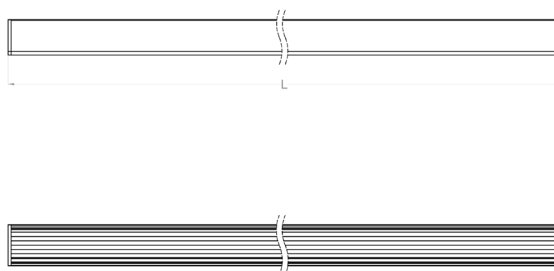



# Armonia Wall Washer

Asymmetric Linear | IP40 | Class III | Dimmable

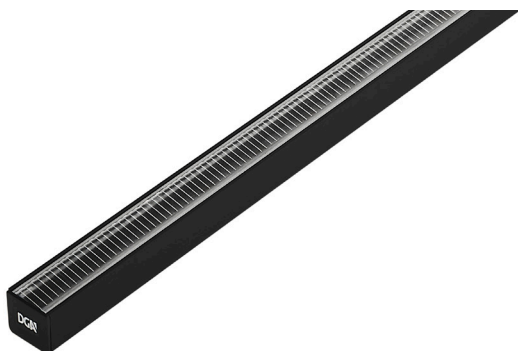

### Integrated Fixing\*

Magnetic fixing Double sided tape Visor Fixing

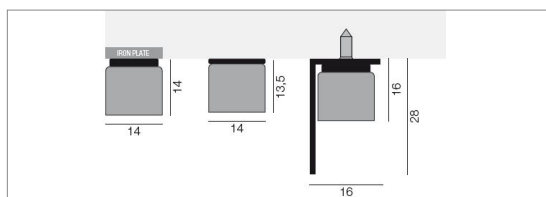

## LIGHT SOURCE & OPTIC

### Power

8W  
12W  
16W  
19W  
23W

### Lens

Wall washer

### Beam Direction

Fixed, Asymmetrical

### Material

PMM

### LED quantity

350

### Binning

2 MacAdam step

### Color temperature & quality

2200K  
2500K  
2700K CRI>90  
3000K CRI>90  
3500K CRI>90  
4000K CRI>90

### Lifetime

L85 >95.000 hrs

## FIXTURE

### Dimensions

L 14mm x H 12mm

### Material

Aluminium

### Body finishes

Black  
Gray

### Weight

200gr/m

### End caps

Aluminium  
Transparent

### Mounting

On surface

### Fixing\*

Magnetic fixing  
Double sided tape  
Visor Fixing  
Without fixing (see accessories)

### Working temperature

-20° / +40°

## ELECTRICAL FEATURES

### Supply current

Constant tension: 24 Vdc

### Driver

Remote (not included)

### Control

On/off  
Push switch  
Phase Cut  
0/1-10 V  
Casambi  
DALI

### Cable exit

Cap exit left

In&Out cap exit

Cap exit right

Left side exit

In&Out side exit

Right side exit

Back exit left

Back in&out exit


Back exit right



# Armonia Wall Washer

## PHOTOMETRIC DATA (3000K CRI>90)

### 8W/m - WW | UGR 24

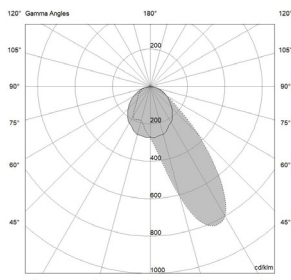


H (m)	D (m)	Eav (lx)
1	2.52	34
2	5.05	9
3	7.57	4
4	10.09	2
5	12.62	1

**Total lumen output**  
522 lm

**Efficacy**  
65 lm/W

### 12W/m - WW | UGR 26

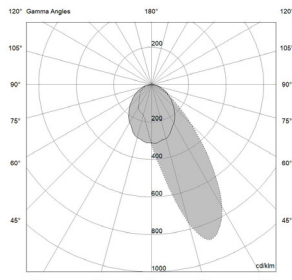


H (m)	D (m)	Eav (lx)
1	2.13	73
2	4.26	18
3	6.39	8
4	8.53	5
5	10.66	3

**Total lumen output**  
804 lm

**Efficacy**  
67 lm/W

### 16W/m - WW | UGR 27

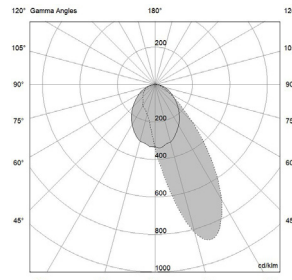


H (m)	D (m)	Eav (lx)
1	2.02	123
2	4.04	31
3	6.06	14
4	8.08	8
5	10.11	5

**Total lumen output**  
1158 lm

**Efficacy**  
72 lm/W

### 19W/m - WW | UGR 28

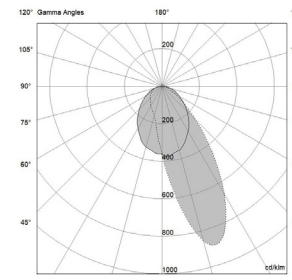


H (m)	D (m)	Eav (lx)
1	1.90	177
2	3.80	44
3	5.69	20
4	7.59	11
5	9.49	7

**Total lumen output**  
1470 lm

**Efficacy**  
92 lm/W

### 23W/m - WW | UGR 28

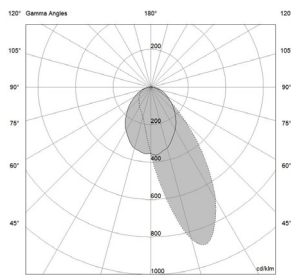

H (m)	D (m)	Eav (lx)
1	1.38	219
2	2.76	55
3	4.14	24
4	5.52	14
5	6.90	9

**Total lumen output**  
1893 lm


**Efficacy**  
82 lm/W

# Armonia Wall Washer

## INSTALLATION ACCESSORIES

### Magnetic brackets

Only for Armonia WW without fixing




Magnetic brackets 0°  
A00533.\_0



Magnetic brackets 30°  
A00837.\_0

### Brackets and screws

Only for Armonia WW without fixing

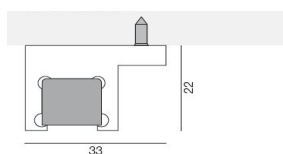

Bracket with screw 0°  
A00494.\_0



Bracket with screw 20°  
A00491.\_0



Bracket with screw 30°  
A00492.\_0




Bracket with screw 45°  
A00493.\_0



Magnetic brackets 60°  
A00495.\_0

### Mounting clips

Only for Armonia WW without fixing

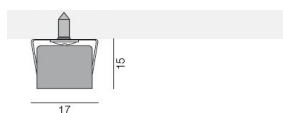


Mounting clip  
A00705.\_0

## SUGGESTED REMOTE DRIVERS


### On/Off :

CV70-F-24-N

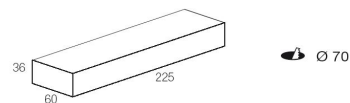

### Multifunction (DALI 2, 0/1-10V, PUSH):

CV75-DM-24-NI



Other options upon request