


Luna 230V IP65

Pendant Lighting | IP65 | Class II | Not dimmable

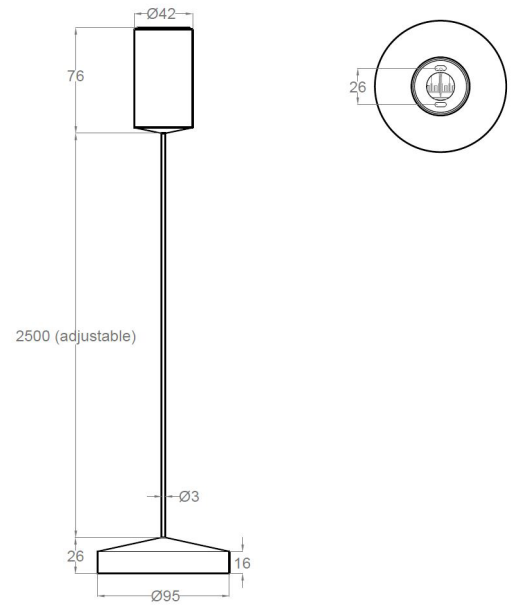

LIGHT SOURCE & OPTIC

Power

7W

Emission

Diffused

Beam Direction

Fixed, Symmetrical

Material

Glass

LED quantity

56

Binning

2 MacAdam steps

Color temperature & quality

2200K CRI>80

2700K CRI>80

3000K CRI>80/90

4000K CRI>80

Lifetime (Ta 25°)

L70 >54.000 hrs

Output (3000K CRI>90)

584 lm

FIXTURE

Dimensions

Ø 95mm x H. 26mm

Material

Aluminium

Body finishes

Black

Titanium

Dark bronze

Champagne gold

Gray

Ceiling canopy finishes

Black (RAL 9005)

White (RAL 9003)

Weight

400gr

Mounting

On surface

Fixing

Screws

Working temperature

-20° / +40°

ELECTRICAL FEATURES

Power Supply

Main Voltage: 220-240 Vac

Driver requirement

Built-in


Control

On/off

Luna 230V IP65

PHOTOMETRIC DATA (3000K CRI>90)

7W - 105° | UGR 26

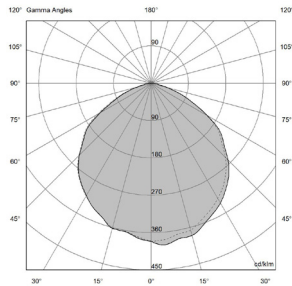

H (m)	D (m)	Eav (lx)
1	2.83	36
2	5.66	9
3	8.49	4
4	11.32	2
5	14.15	1

Total lumen output
363 lm

Efficacy
52 lm/W