

LIGHT SOURCE

LED quantity	1
Power max	1 W , 2 W
Total lumen output (3000K CRI>90)	131 lm (2W)
Efficacy lm/W (3000K CRI>90)	65 lm/W (2W)
LOR (3000K CRI>90)	-
CRI	>80 - >90
LED Temperature	2700K -3000K -3000K CRI>90 -4000K -5000K
Average operational life	50.000 hours

OPTIC

Material	PMMA
Available optics	40°
Beam direction	Fixed
Flux symmetry	Symmetrical
Accessories	-

LED FIXTURE

Material	Aluminum
Finish	Painted (White)
Available finishes	White
IP Rate	IP40
Working Temperature	-20° ÷ +40°
Accessories	-



ELECTRICAL FEATURES

Driver	Remote
Dimmable	Push, 1-10V, DALI
For emergency lighting	-
Connection in	In series at 350mA-500mA
Class	III

MECHANICAL FEATURES

Dimensions (mm)	Ø43 x 47
Weight	50 gr
Mounting	Wall, Ceiling
Cut-out (mm)	Ø40
Use	Indoor

NOTES

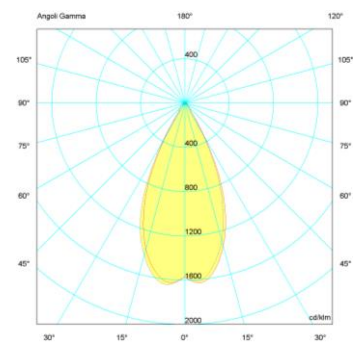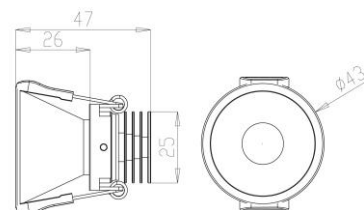

2W

H(m)	D(m)	E _{max} (lx)	E _{av} (lx)
40°			
1.00	0.89	214	122
2.00	1.79	53	30
3.00	2.68	24	14
4.00	3.57	13	8
5.00	4.47	9	5