


Steps light | IP40 | Class III | Dimmable



Lui 01

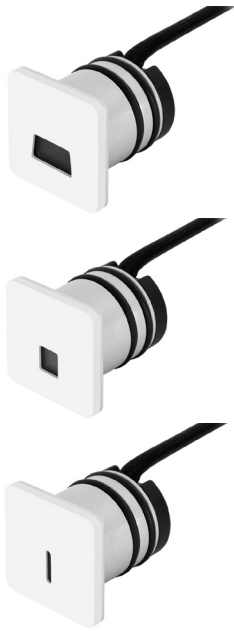


Lui 02




Lui 03



Spring mounting support

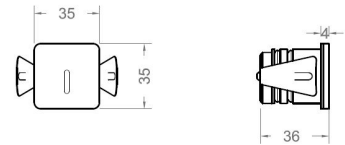


Frame for trimless installation

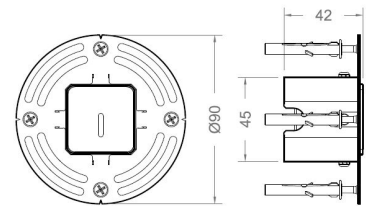

Aluminum recessed box with edge



Aluminum recessed box

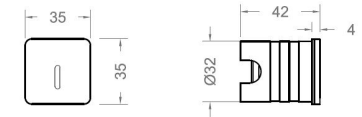

LIGHT SOURCE & OPTIC

Power

1W

2W

Emission

45°

Beam Direction

Fixed, Asymmetrical

Material

Methacrylate

LED quantity

1

Binning

2 MacAdam Steps

Color temperature & quality

2200K CRI>80

2700K CRI>80

3000K CRI>80

4000K CRI>80

Lifetime

(L90) >55.000 hrs

FIXTURE

Dimensions

Ø 35mm x H 36mm

Material

Aluminium

Stainless Steel

Body finishes

Black

Gray

White (RAL 9003)

Stainless Steel AISI 316L

Weight

40gr

Mounting

Recessed

Fixing

See accessories

Working temperature

-20° / +40°

ELECTRICAL FEATURES

Power supply

Constant current:

350 mA

500 mA

Typical Vf= 3V

Driver requirement

Remote (not included)

Control

On/off

Push switch

Phase Cut


0/1-10 V

Casambi

DALI


PHOTOMETRIC DATA (3000K CRI>80)

2W - LUI 01 | UGR 32

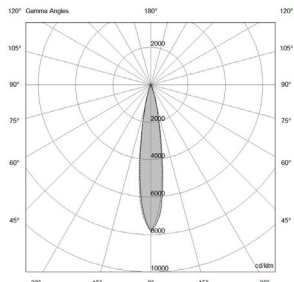


H (m)	D (m)	Eav (lx)
1	1.16	8
2	2.33	2
3	3.49	1
4	4.65	0
5	5.81	0

2W - LUI 02 | UGR 30

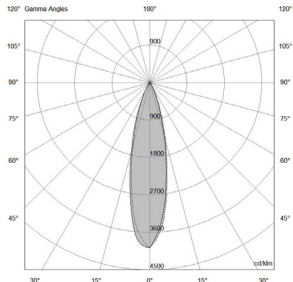

H (m)	D (m)	Eav (lx)
1	0.87	7
2	1.74	2
3	2.61	1
4	3.48	0
5	4.37	0

2W - LUI 03 | UGR 27

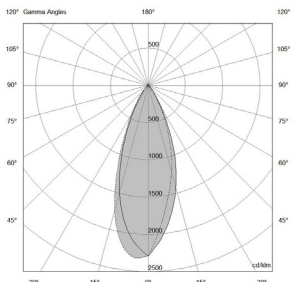

H (m)	D (m)	Eav (lx)
1	0.56	5
2	1.11	1
3	1.67	0
4	2.23	0
5	2.78	0

Total lumen output
20 lm

Efficacy
10 lm/W

Total lumen output
14 lm

Efficacy
7 lm/W

Total lumen output
7 lm

Efficacy
4 lm/W

INSTALLATION ACCESSORIES

Aluminum recessed box (A01578.40)




Aluminum recessed box with edge (A01577._0)



Spring mounting support (A01579.60)




Frame for trimless installation (A01576.30)




INSTALLATION TOOL

Hole saw (A00832.H0)
available for easier installation




SUGGESTED REMOTE DRIVERS

On/Off (RIPPLE FREE):
CC20-F-350/500-N



Multifunction (DALI 2, 0/1...10V, PUSH, RIPPLE FREE, AM DIMMING):
CC25-DM-350-N



Other options upon request